



ENSHINE Lighting
lights up your world for
love and hope

www.enshinelighting.com





Company Profile

Enshine lighting was established in 2006 to specialize in manufacturing LED lamps.

By 2023

● Factory Area
70,000 square meters


● Production Line
30 lines

● Daily Capacity
360,000pcs

Enshine Lighting has a mature product R&D, production, quality control, supply chain management system. From raw material, production line to finished-products, each process is inspected strictly by our conscientious and experienced QC auditors to ensure the stable quality and low cost.

We design, we R&D, we manufacture, we inspect, we consistently surpass customer expectations in quality, innovation, value and service.

Quality is not an option, it's an obligation!



ErP

CB



VR Visit Factory



▲ R&D Department




▲ Manufacturing Shop




▲ Injection Workshop

IP65

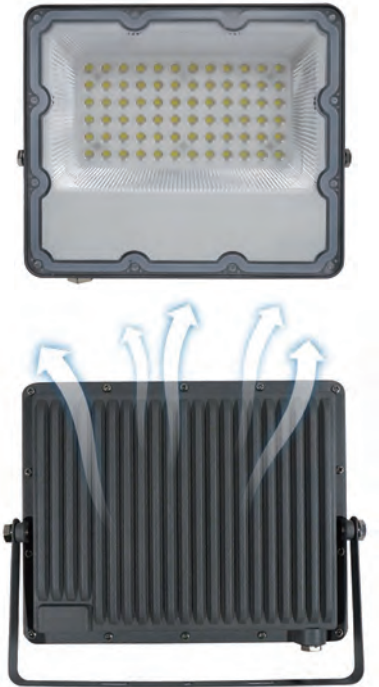

Die-casting Aluminum

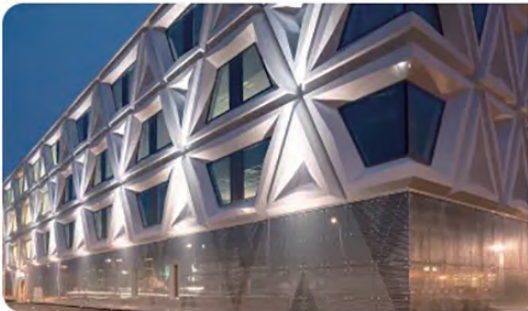

Model Number	Power	Input Voltage	Luminous flux	Colour Temp.	C.R.I.	IP	Material	Size
YX-FL-01	10W	AC 100-265V	100-110lm/w	6000K-6500K	>80	IP65	Die-cast Alu+PC	127×100×25mm
YX-FL-01	20W	AC 100-265V	100-110lm/w	6000K-6500K	>80	IP65	Die-cast Alu+PC	150×128×25mm
YX-FL-01	30W	AC 100-265V	100-110lm/w	6000K-6500K	>80	IP65	Die-cast Alu+PC	161×123×25mm
YX-FL-01	50W	AC 100-265V	100-110lm/w	6000K-6500K	>80	IP65	Die-cast Alu+PC	190×170×25mm
YX-FL-01	100W	AC 100-265V	100-110lm/w	6000K-6500K	>80	IP65	Die-cast Alu+PC	230×195×25mm
YX-FL-01	150W	AC 100-265V	100-110lm/w	6000K-6500K	>80	IP65	Die-cast Alu+PC	255×206×25mm
YX-FL-01	200W	AC 100-265V	100-110lm/w	6000K-6500K	>80	IP65	Die-cast Alu+PC	255×220×25mm



Tempered Glass




IP65



Die-casting Aluminum



Model Number	Power	Input Voltage	Luminous flux	Colour Temp.	C.R.I.	IP	Material	Size
YX-FL-02	200W	AC 100-265V	80lm/w	6000K-6500K	>80	IP65	Die-cast Alu+Glass	335×290×55mm
YX-FL-02	300W	AC 100-265V	80lm/w	6000K-6500K	>80	IP65	Die-cast Alu+Glass	430×340×57mm
YX-FL-02	400W	AC 100-265V	80lm/w	6000K-6500K	>80	IP65	Die-cast Alu+Glass	507×340×57mm
YX-FL-02	500W	AC 100-265V	80lm/w	6000K-6500K	>80	IP65	Die-cast Alu+Glass	590×340×57mm
YX-FL-02	600W	AC 100-265V	80lm/w	6000K-6500K	>80	IP65	Die-cast Alu+Glass	690×340×57mm

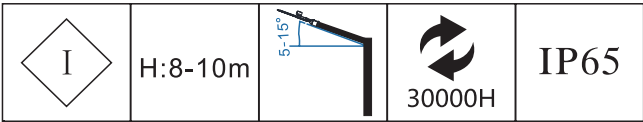

Light sensor
Accessories


Model Number	Power	Input Voltage	Luminous flux	Colour Temp.	C.R.I.	IK/IP	Size
YX-SL-01	50W	AC 100-305V	100-140lm/w	3000K-6000K	>70	IK08/IP65	500×160×83mm
YX-SL-01	100W	AC 100-305V	100-140lm/w	3000K-6000K	>70	IK08/IP65	500×160×83mm
YX-SL-01	150W	AC 100-305V	100-140lm/w	3000K-6000K	>70	IK08/IP65	637×211×83mm
YX-SL-01	200W	AC 100-305V	100-140lm/w	3000K-6000K	>70	IK08/IP65	676×255×83mm
YX-SL-01	250W	AC 100-305V	100-140lm/w	3000K-6000K	>70	IK08/IP65	783×260×83mm



Model Number	Power	Input Voltage	Luminous flux	Colour Temp.	C.R.I.	IP	Size
YX-SL-02	50W	AC 100-265V	100lm/w	6000K-6500K	>70	IK08/IP65	408×138×23mm
YX-SL-02	100W	AC 100-265V	100lm/w	6000K-6500K	>70	IK08/IP65	460×151×23mm
YX-SL-02	150W	AC 100-265V	100lm/w	6000K-6500K	>70	IK08/IP65	537×183×23mm
YX-SL-02	200W	AC 100-265V	100lm/w	6000K-6500K	>70	IK08/IP65	650×211×24mm




Model Number	Power	Input Voltage	Luminous flux	Colour Temp.	C.R.I.	IK/IP	Size
YX-SL-03	50W	AC 100-265V	90-100lm/w	3000K-6000K	>70	IK08/IP65	424×173×75mm
YX-SL-03	100W	AC 100-265V	90-100lm/w	3000K-6000K	>70	IK08/IP65	506×212×74mm
YX-SL-03	150W	AC 100-265V	90-100lm/w	3000K-6000K	>70	IK08/IP65	601×227×75mm
YX-SL-03	200W	AC 100-265V	90-100lm/w	3000K-6000K	>70	IK08/IP65	655×240×72mm
YX-SL-03	250W	AC 100-265V	90-100lm/w	3000K-6000K	>70	IK08/IP65	815×300×81mm

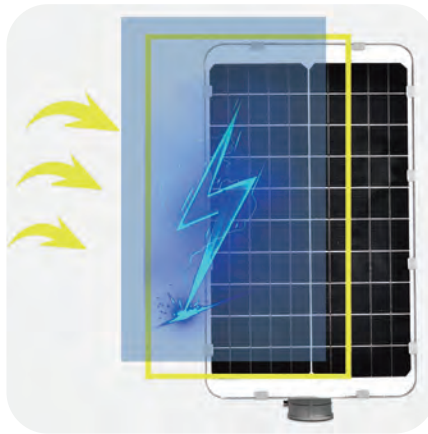


A++ Solar Board



Time control +Sensor

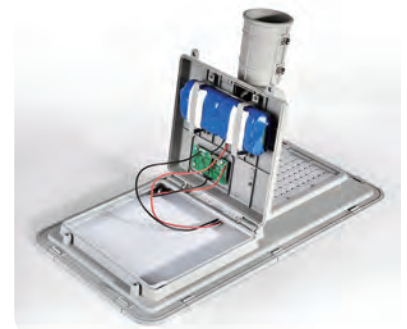


Famous brand Battery

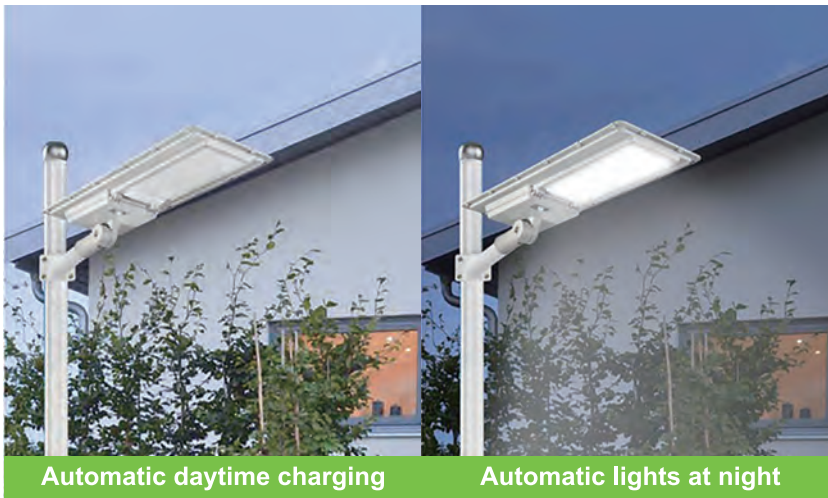

Automatic daytime charging

Automatic lights at night

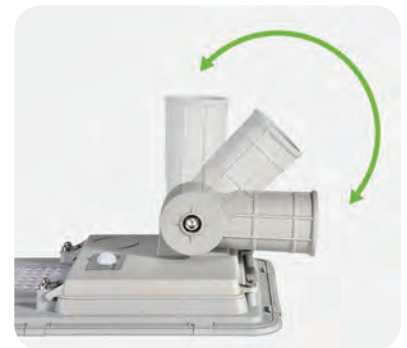

90° Rotatable

Model Number	Power	Solar Panel Power	Battery Capacity	Luminous flux	Colour Temp.	C.R.I.	IP	Size
YX-SL-04-SS	100W	14W	12AH	120lm/w	6000K-6500K	>70	IK08/IP65	550×288×130mm
YX-SL-04-SS	200W	24W	20AH	130lm/w	6000K-6500K	>70	IK08/IP65	660×332×130mm
YX-SL-04-SS	300W	36W	36AH	130lm/w	6000K-6500K	>70	IK08/IP65	855×350×155mm

IP65



Model Number	Power	Input Voltage	Luminous flux	Colour Temp.	C.R.I.	IP	PF	Lifespan	Material	Size
YX-GL-01	50W	AC 85-265V	100-110lm/w	2700K-7000K	>70	IP65	>0.9	50,000H	Die-cast Alu+Tempered glass	D455×150mm
YX-GL-01	100W	AC 85-265V	100-110lm/w	2700K-7000K	>70	IP65	>0.9	50,000H	Die-cast Alu+Tempered glass	D455×150mm
YX-GL-01	150W	AC 85-265V	100-110lm/w	2700K-7000K	>70	IP65	>0.9	50,000H	Die-cast Alu+Tempered glass	D455×150mm



Die-casting Aluminum + PC



Model Number	Power	Input Voltage	Luminous flux	Colour Temp.	C.R.I.	IK/IP	Lifespan	Size
YX-HL-01	100W	AC 100-277V	120-140lm/w	3000K-6000K	>70	IK08/IP65	30000H	D290×151mm
YX-HL-01	150W	AC 100-277V	120-140lm/w	3000K-6000K	>70	IK08/IP65	30000H	D333×152mm
YX-HL-01	200W	AC 100-277V	120-140lm/w	3000K-6000K	>70	IK08/IP65	30000H	D377×165mm




Direct docking



Turn connection



Wire connection

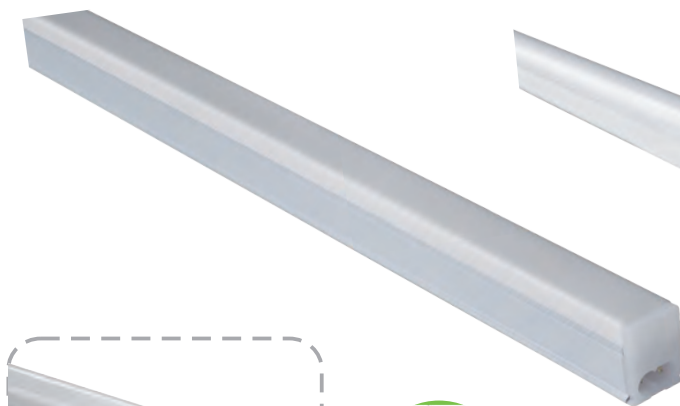

YX-T5-SE



4000LM
1.2m

Material:

- PC/NANO
- GLASS
- AL+PC

YX-T8-SE



Model Number	Rated Wattage	Input Voltage	Colour Temp.	Luminous flux	C.R.I.	Beam Angle	Lamp Size
YX-T5-SE	6-32W	AC 90-265V	2700K-7000K	100lm/W	>80	180°	300/600/1200mm
YX-T8-SE	6-40W	AC 90-265V	2700K-7000K	100lm/W	>80	180°	300/600/1200mm
YX-T8	6-40W	AC 90-265V	2700K-7000K	100lm/W	>80	180°	300/600/1200mm




Linkable



Model Number	Rated Wattage	Input Voltage	Colour Temp.	Luminous flux	IP	C.R.I.	Width
YX-BAN-B	9-48W	AC 90-265V	2700K-7000K	90lm/w	IP20/IP44	>80	75mm
YX-BAN-C	9-48W	AC 90-265V	2700K-7000K	90lm/w	IP20/IP44	>80	60mm
YX-BAN-AA	9-48W	AC 90-265V	2700K-7000K	90lm/w	IP20/IP44	>80	116mm

Mini Batten Light

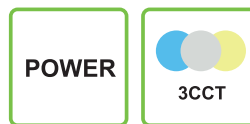

SELECTABLE

Model Number	Rated Wattage	Input Voltage	Colour Temp.	Lumen(±10%)	C.R.I.	Material	Lamp Size
YX-BAN-M	10/15W	AC 90-265V	3 CCT	1000/1500lm	>80	PC	600×60×70mm
YX-BAN-M	15/20W	AC 90-265V	3 CCT	1500/2000lm	>80	PC	900×60×70mm
YX-BAN-M	20/30W	AC 90-265V	3 CCT	2000/3000lm	>80	PC	1200×60×70mm



YX-BAN-E



YX-BAN-D



Model Number	Rated Wattage	Input Voltage	Colour Temp.	Luminous flux	Material	C.R.I.	Width
YX-BAN-E	18-36W	AC 90-265V	2700K-7000K	90lm/w	AL+PC	>80	60mm
YX-BAN-D	18-100W	AC 90-265V	2700K-7000K	90lm/w	PC	>80	60mm

TRI-PROOF LIGHT SERIES

● Water Proof. Corrosion Proof. Dust Proof



IP65

Install fittings



Model Number	Rated Wattage	Input Voltage	Colour Temp.	Lumen(±10%)	C.R.I.	IP	Lamp Size
YX-LNF	18W	AC 90-265V	2700K-7000K	1620lm	>80	IP65	645×325×15mm
YX-LNF	36W	AC 90-265V	2700K-7000K	3240lm	>80	IP65	1245×325×15mm
YX-LNF	45W	AC 90-265V	2700K-7000K	4200lm	>80	IP65	1245×325×15mm

银旭（福建）智能电器有限公司

Enshine (Fujian) Intelligent Electric Appliance Co., Ltd.

厦门银旭工贸有限公司

Xiamen Yinxu Industry & Trade Co., Ltd.

地址：福建省漳州市华安经济开发区正兴路17号银旭工业园

Add: Enshine Industrial park, No.17 Zhengxing Road, Hua'an Economic
Development Zone, Zhangzhou, Fujian, China

International Marketing

Tel : +86-592-5550151 Fax : +86-592-5550156

Mobile Phone : +86-15980808787

E-mail : sales@yinxuxm.com

www.enshinelighting.com



WeChat



Website