

JMKP030-3A


微型气泵 Mini Air Pump




一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、眼保姆、鱼缸、咖啡机等充气产品。

Mainly used for electronic sphygmomanometer, massager, blood pressure monitor, eye nanny, fish tank, coffee maker and other equipment products.

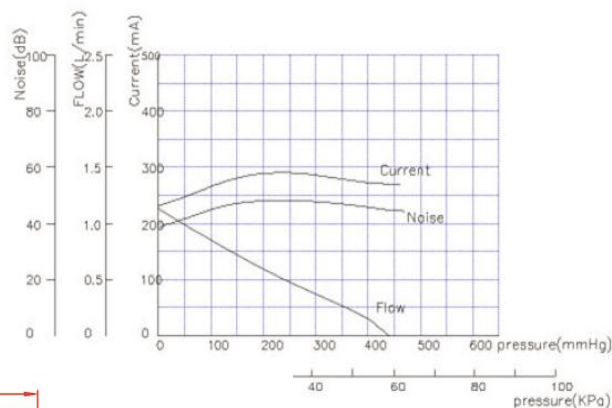

二、产品尺寸 Product Dimension:

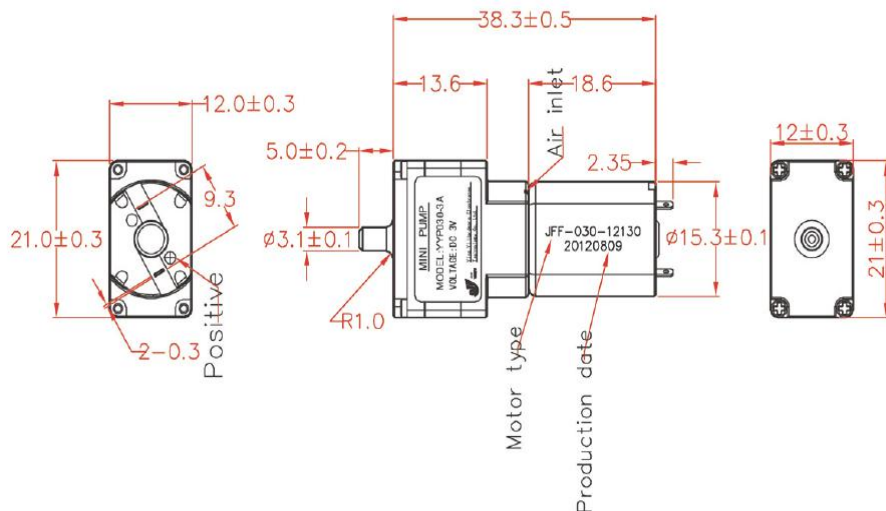

三、产品规格 Product Specification:

额定电压 Rated Voltage	DC 3V
额定电流 Rated Current	≤350mA
充气时间 Inflation Time	≤8sec (0~300mmHg, 100cc tank)
最大压力 Maximum Pressuer	≥350mmHg
高压气密(300mmHg) Leakage	≤3mmHg/min
低压气密(50mmHg) Leakage	≤3mmHg/min
再启动电压 Reatart Voltage	≤DC 2.0V
噪音 Noise	≤60dB (30cm away)
寿命 Rated Life	≥30000 cycles



JMKP095-12B


微型气泵 Mini Air Pump




一、产品应用 Product Applications:

主要用于按摩椅、按摩器、气垫床等充气产品。

Mainly used for air massage chair, massager, air mattress and other equipment products.

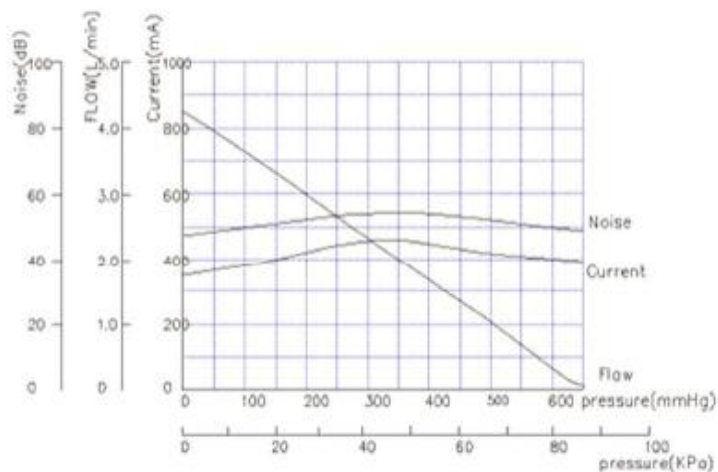

二、产品尺寸 Product Dimension:

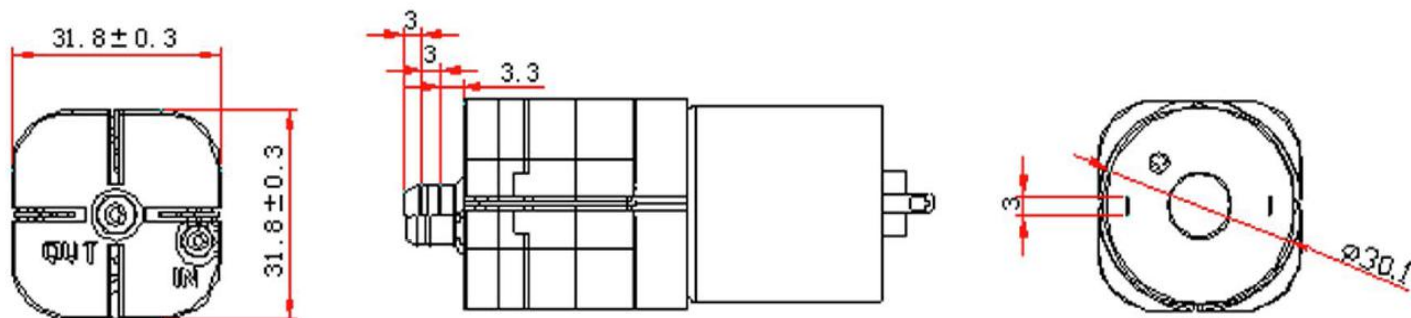

三、产品规格 Product Specification:

额定电压 Rated Voltage	DC 12V
额定电流 Rated Current	≤600mA
流量 Air Flow	4-5LPM
最大压力 Maximum Pressuer	≥80Kpa
高压气密(300mmHg) Leakage	≤3mmHg/min
再启动电压 Reartart Voltage	≤DC 9.6V
噪音 Noise	≤65dB (30cm away)
寿命 Rated Life	≥30000 cycles



JMKP370-6A


微型气泵 Mini Air Pump




一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、眼保姆、鱼缸、智能吸尘器等充气产品。

Mainly used for electronic sphygmomanometer, massager, blood pressure monitor, eye nanny, fish tank, intelligent cleaner and other equipment products.

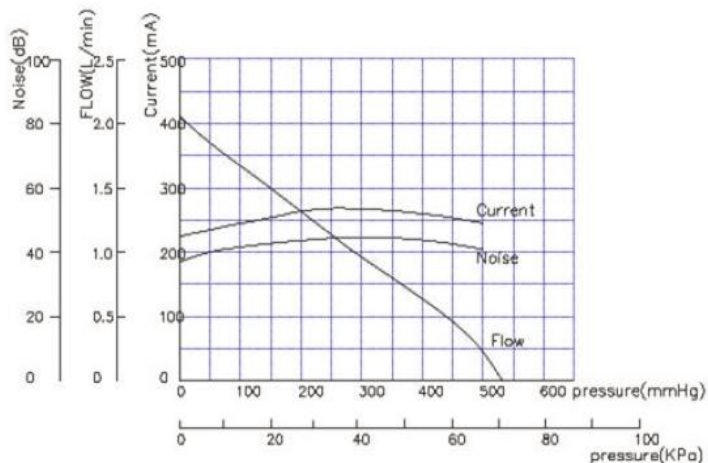

二、产品尺寸 Product Dimension:

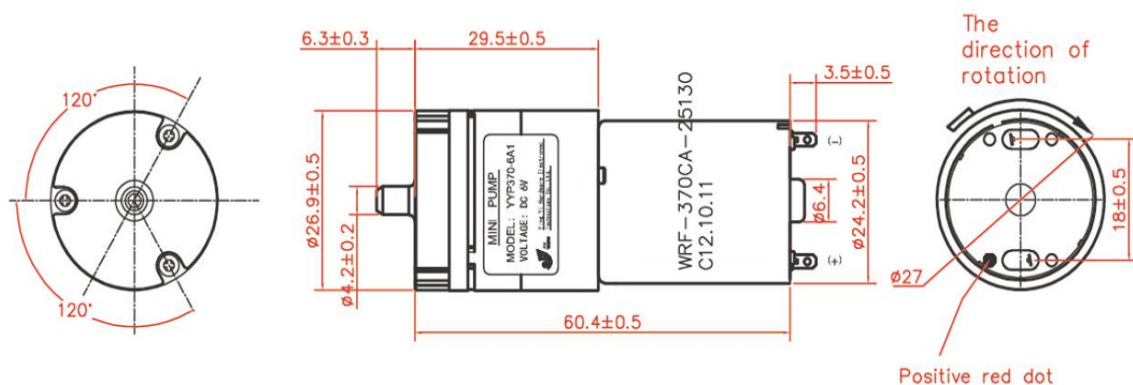

三、产品规格 Product Specification:

额定电压 Rated Voltage	DC 6V
额定电流 Rated Current	≤420mA
充气时间 Inflation Time	≤10sec (0~300mmHg, 500cc tank)
最大压力 Maximum Pressuer	≥400mmHg
高压气密 (300mmHg) Leakage	≤3mmHg/min
低压气密(50mmHg) Leakage	≤3mmHg/min
再启动电压 Reatart Voltage	≤DC 3.0V
噪音 Noise	≤60dB (30cm away)
寿命 Rated Life	≥30000 cycles



JMKP370-6B1


微型气泵 Mini Air Pump




一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、眼保姆、鱼缸、智能吸尘器等充气产品。

Mainly used for electronic sphygmomanometer, massager, blood pressure monitor, eye nanny, fish tank, intelligent cleaner and other equipment products.

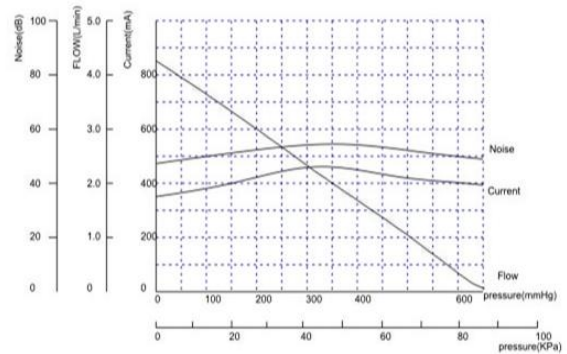

二、产品尺寸 Product Dimension:

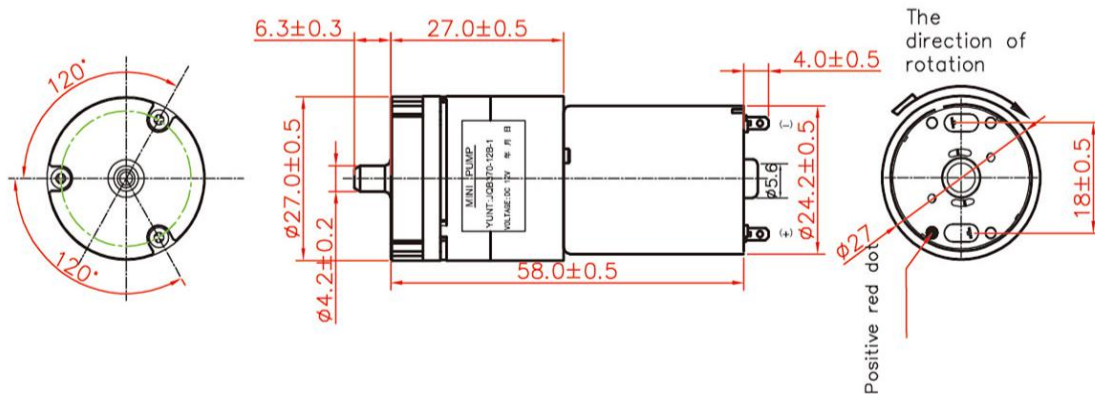

三、产品规格 Product Specification:

额定电压 Rated Voltage	DC 6V
额定电流 Rated Current	≤420mA
充气时间 InflationTime	≤10sec (0~300mmHg , 500cc tank)
最大压力 Maximum Pressuer	≥400mmHg
高压气密(300mmHg) Leakage	≤3mmHg/min
低压气密(50mmHg) Leakage	≤3mmHg/min
再启动电压 Reartart Voltage	≤DC 3.0V
噪音 Noise	≤60dB (30cm away)
寿命 Rated Life	≥30000 cycles

JMKP370-6B2


微型气泵 Mini Air Pump




一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、眼保姆、鱼缸、智能吸尘器等充气产品。

Mainly used for electronic sphygmomanometer, massager, blood pressure monitor, eye nanny, fish tank, intelligent cleaner and other equipment products.

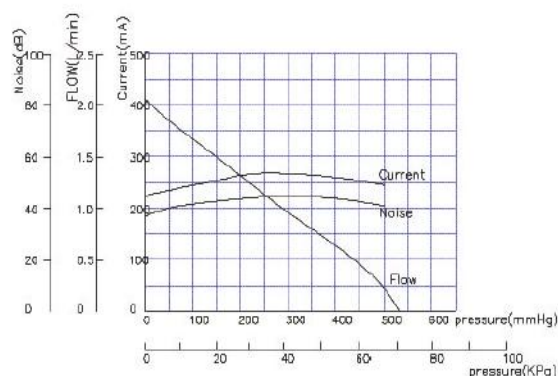

二、产品尺寸 Product Dimension:

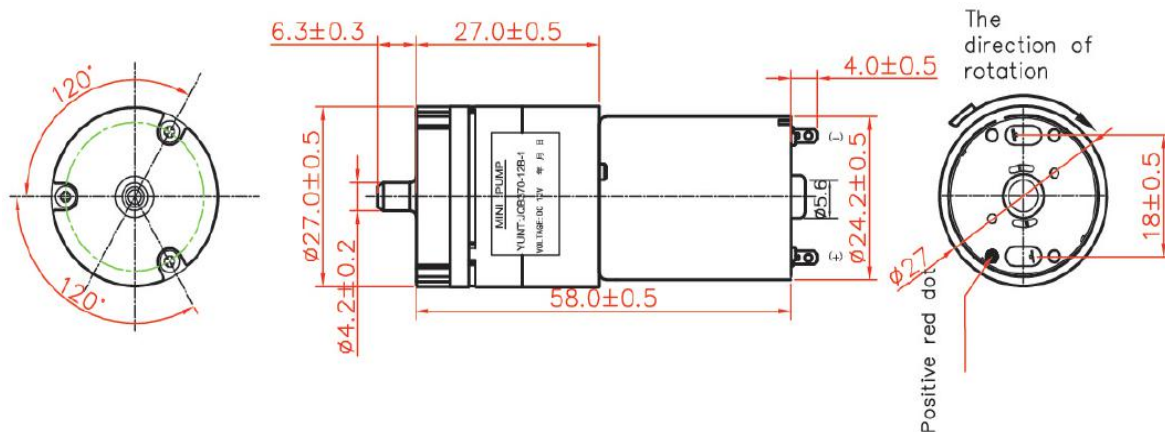

三、产品规格 Product Specification:

额定电压 Rated Voltage	DC 6V
额定电流 Rated Current	≤400mA
充气时间 Inflation Time	≤12sec (0~300mmHg , 500cc tank)
最大压力 Maximum Pressuer	≥400mmHg
高压气密 Leakage	≤3mmHg/min (300mmHg at 500cc tank)
低压气密 Leakage	≤3mmHg/min (50mmHg at 500cc tank)
再启动电压 Reatart Voltage	≤DC 3.0V
噪音 Noise	≤55dB (30cm away)
寿命 Rated Life	≥30000 cycles



JMKP370-6E


微型气泵 Mini Vacuum Pump




一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、吸鼻涕器、臭氧发生器、电饭煲等充气产品。

Mainly used for electronic sphygmomanometer, massager, blood pressure monitor, breathe in nasal mucus, ozone generator, electric rice cooker and other equipment products.

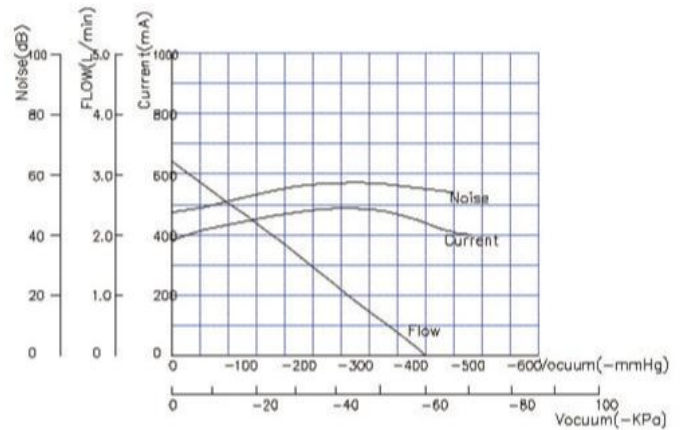

二、产品尺寸 Product Dimension:

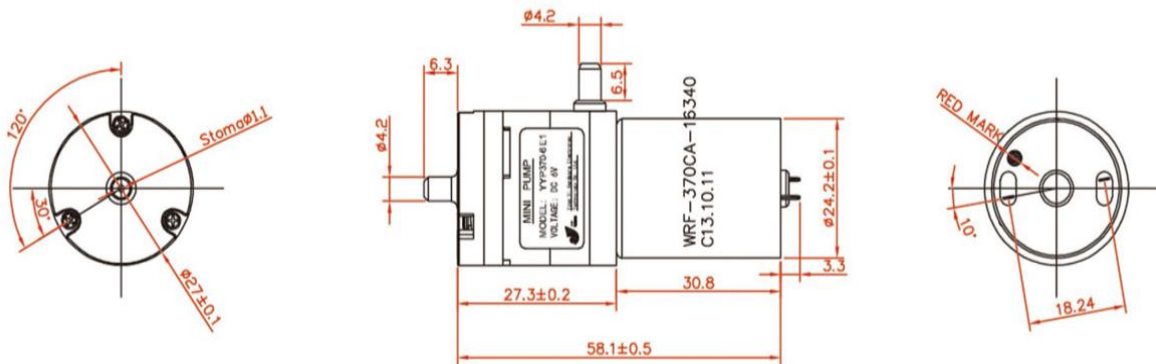

三、产品规格 Product Specification:

额定电压 Rated Voltage	DC 6V
额定电流 Rated Current	≤600mA
流量 Air Flow	≥3.0LPM
最大压力 Maximum Pressuer	≥80KPa
最大真空度 Maximum Vocuum	≤-50KPa
再启动电压 Reatart Voltage Degree	≤DC 4.0V
噪音 Noise	≤65dB (30cm away)
寿命 Rated Life	≥500H


JMKP370-12C1

微型水泵 Mini Water Pump


一、产品应用 Product Applications:

主要用于家用电器、便携饮水设备、咖啡机、加湿器、美容仪器等产品。

Mainly used for household appliances, portable drinking water equipment, coffee machine, humidifier, beauty instrument.

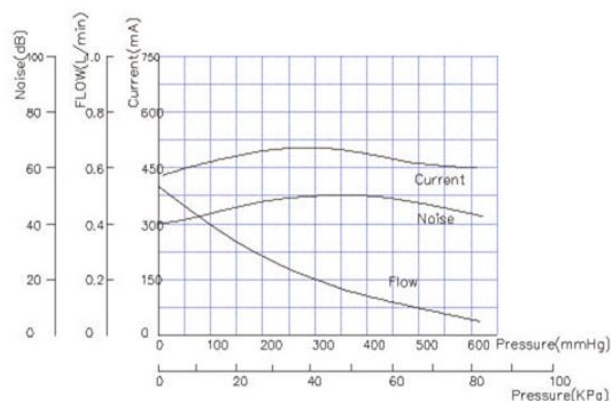

二、产品尺寸 Product Dimension:

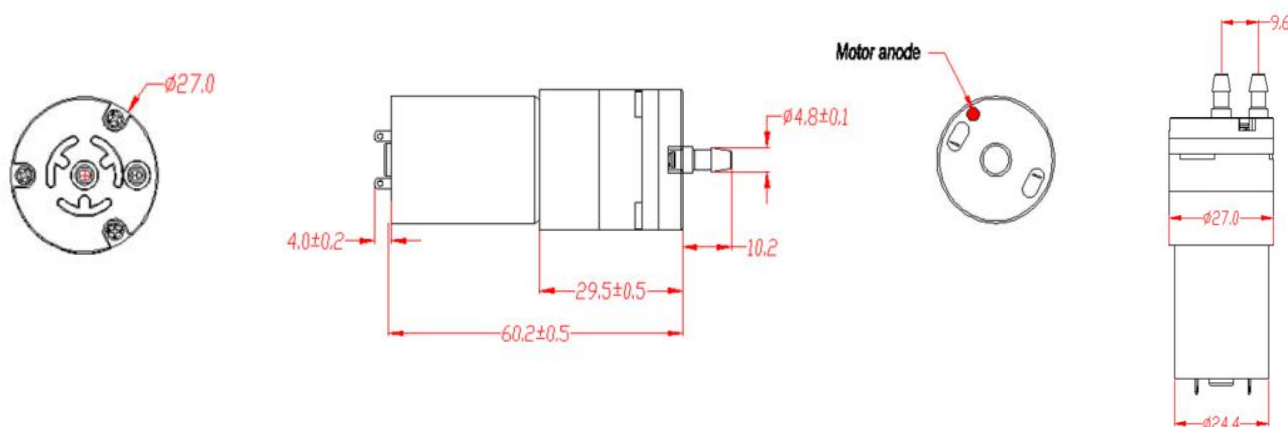

三、产品规格 Product Specification:

额定电压 Rated Voltage	DC 12V
额定电流 Rated Current	≤500mA
流量 Water Flow	0.3-0.4LPM
最大压力 Maximum Pressuer	≥80KPa
最大真空度 Maximum Vocuum	≤-40KPa
再启动电压 Reatart Voltage	≤DC 9.6V
噪音 Noise	≤65dB (30cm away)
寿命 Rated Life	≥30000cycyles

JMKP370-12C4

微型水泵 Mini Water Pump





一、产品应用 Product Applications:

主要用于家用电器、便携饮水设备、咖啡机、加湿器、美容仪器等产品。

Mainly used for household appliances, portable drinking water equipment, coffee machine, humidifier, beauty instrument.

二、产品尺寸 Product Dimension:

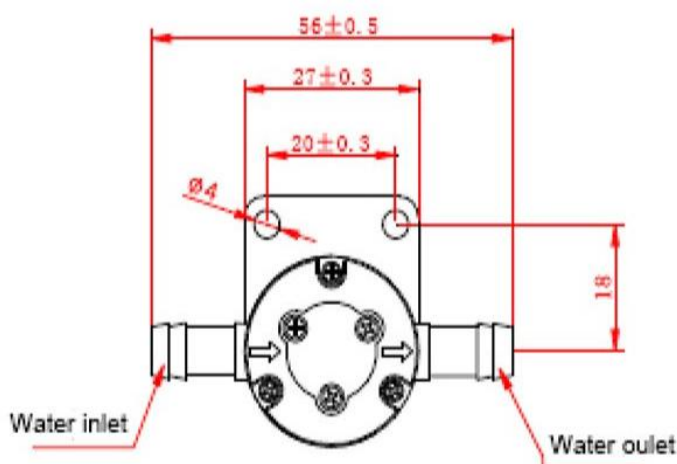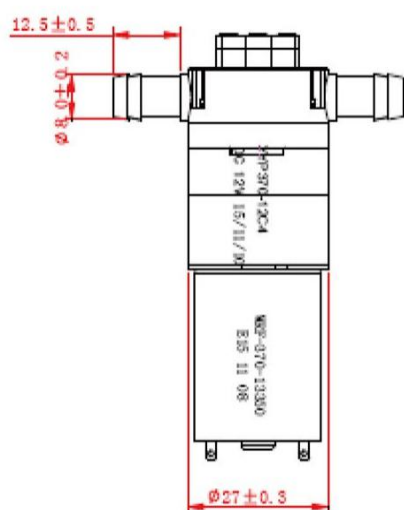

三、产品规格 Product Specification:

额定电压 Rated Voltage	DC 12V
额定电流 Rated Current	≤300mA
流量 Water Flow	0.7-1.2LPM
最大压力 Maximum Pressuer	45~90KPa
最大真空度 Maximum vocuum	≤-40KPa
再启动电压 Reatart voltage	≤DC 9V
噪音 Noise	≤65dB (30cm away)
寿命 Rated Life	≥30000cycyles




JMKP370-12C3

微型水泵 Mini Water Pump


一、产品应用 Product Applications:

主要用于家用电器、便携饮水设备、咖啡机、加湿器、美容仪器等产品。

Mainly used for household appliances, portable drinking water equipment, coffee machine, humidifier, beauty instrument.

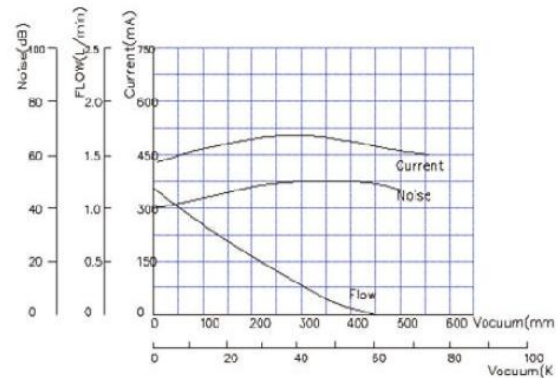

二、产品尺寸 Product Dimension:

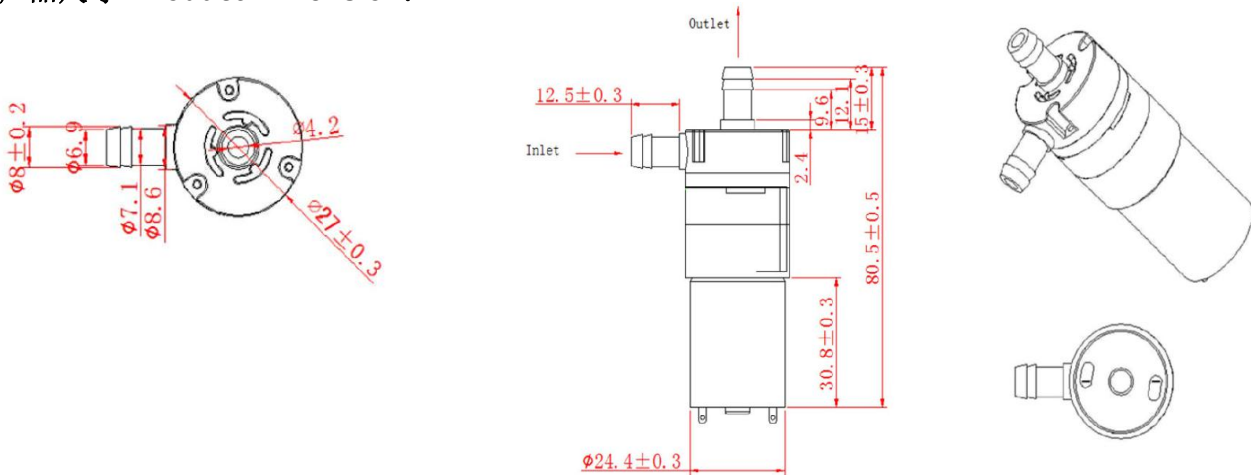

三、产品规格 Product Specification:

额定电压 Rated Voltage	DC 12V
额定电流 Rated Current	$\leq 500\text{mA}$
流量 Water Flow	0.5-0.7LPM
最大压力 Maximum Pressuer	$\geq 80\text{KPa}$
最大真空度 Maximum Vocuum	$\leq -40\text{KPa}$
再启动电压 Reatart Voltage	$\leq \text{DC } 9.6\text{V}$
噪音 Noise	$\leq 65\text{dB}$ (30cm away)
寿命 Rated Life	$\geq 30000\text{cycles}$



JMKP370-12C4

微型水泵 Mini Water Pump





一、产品应用 Product Applications:

主要用于家用电器、便携饮水设备、咖啡机、加湿器、美容仪器等产品。

Mainly used for household appliances, portable drinking water equipment, coffee machine, humidifier, beauty instrument.

二、产品尺寸 Product Dimension:

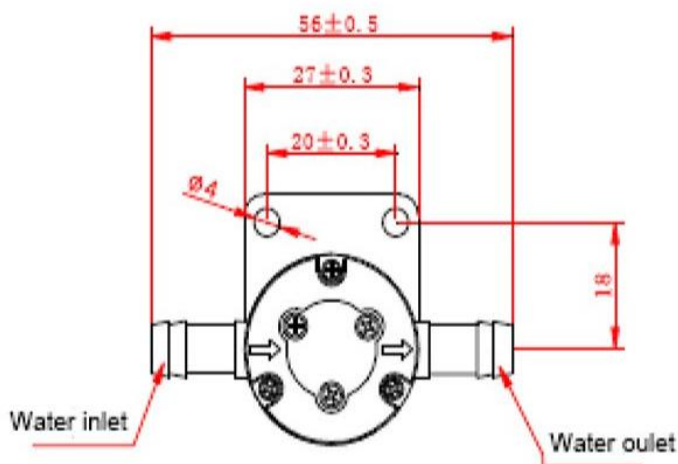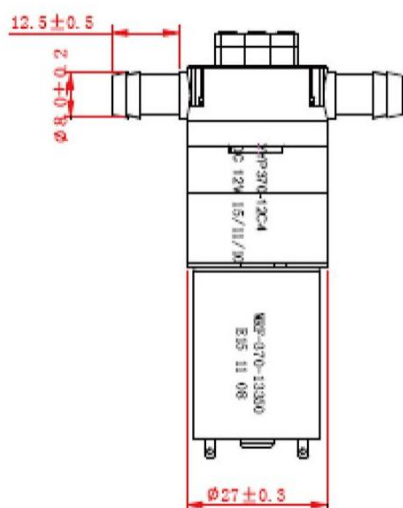


三、产品规格 Product Specification:

额定电压 Rated Voltage	DC 12V
额定电流 Rated Current	≤300mA
流量 Water Flow	0.7-1.2LPM
最大压力 Maximum Pressuer	45~90KPa
最大真空度 Maximum vocuum	≤-40KPa
再启动电压 Reatart voltage	≤DC 9V
噪音 Noise	≤65dB (30cm away)
寿命 Rated Life	≥30000cycyles

微型气泵 Mini Air Pump

主要用于咖啡机等充气产品。

Mainly used for coffee maker and other equipment products.

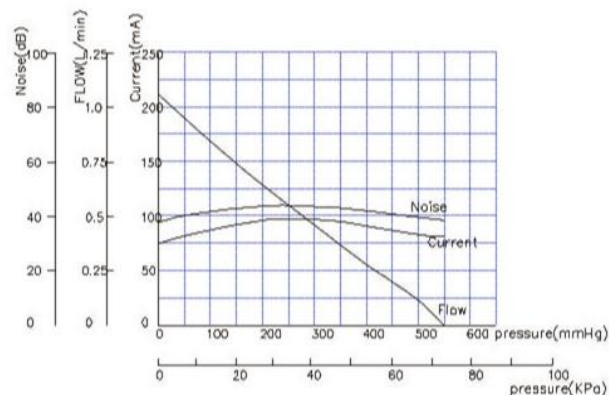

额定电压 Rated Voltage	DC 12V
额定电流 Rated Curren	≤200mA
流量 Air Flow	≥1.0LPM
最大压力 Maximum Pressuer	≥70KPa
高压气密 Leakage	≤3mmHg/min (300mmHg at 500cc tank)
再启动电压 Reatart voltage	≤DC 6.0V
噪音 Noise	≤55dB (30cm away)
寿命 Rated Life	≥100000cycyles



JMKP370-12F


微型气泵 Mini Air Pump




一、产品应用 Product Applications:

主要用于咖啡机等充气产品。

Mainly used for coffee maker and other equipment products.

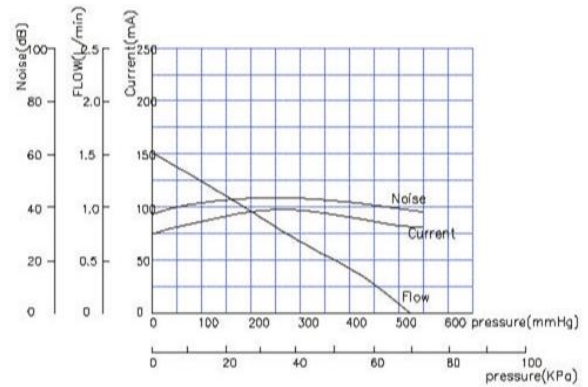

二、产品尺寸 Product Dimension:

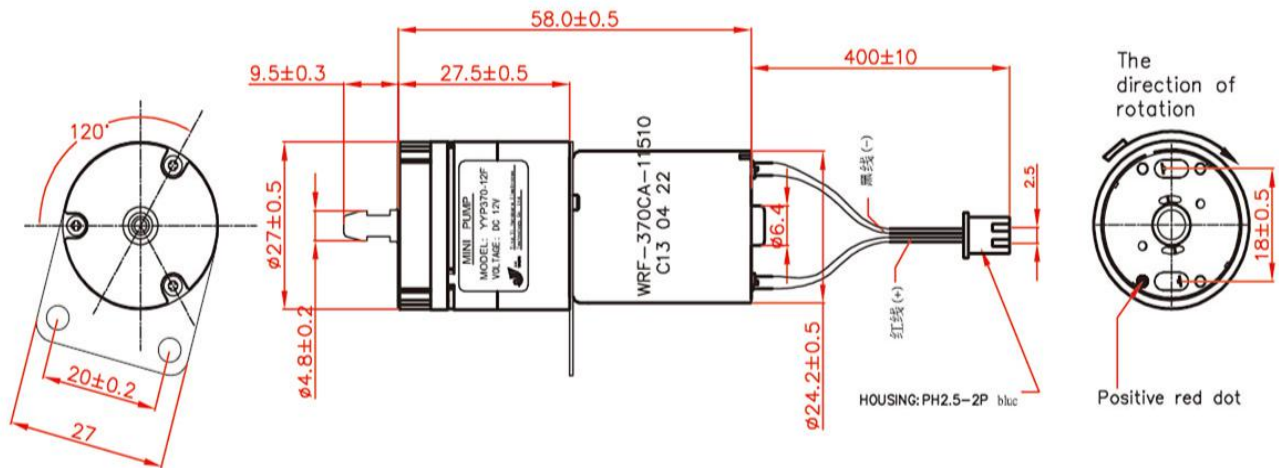

三、产品规格 Product Specification:

额定电压 Rated Voltage	DC 12V
额定电流 Rated Current	≤ 150mA
流量 Air Flow	≥ 1.0LPM
最大压力 Maximum Positive Pressuer	≥ 60KPa
高压气密 Leakage	≤ 3mmHg/min (300mmHg at 500cc tank)
再启动电压 Reatart voltage	≤ DC 6.0V
噪音 Noise	≤ 55dB (30cm away)
寿命 Rated Life	≥ 100000cycyles

JMKP520-12A


微型气泵 Mini Air Pump




一、产品应用 Product Applications:

主要用于按摩器、眼保姆、足浴盆、汽车按摩椅等充气产品

Mainly used for massager, eye nanny, foot tub, massage chair and other equipment products.

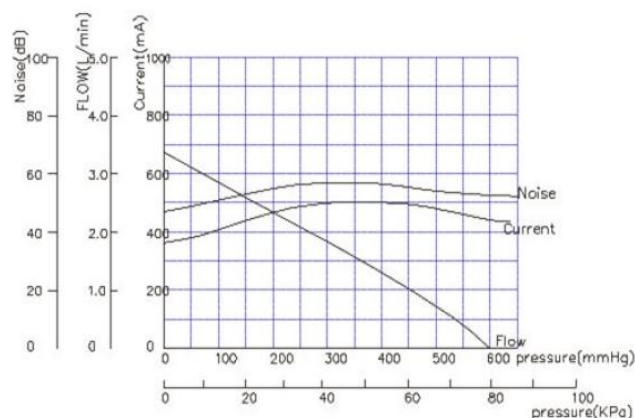

二、产品尺寸 Product Dimension:

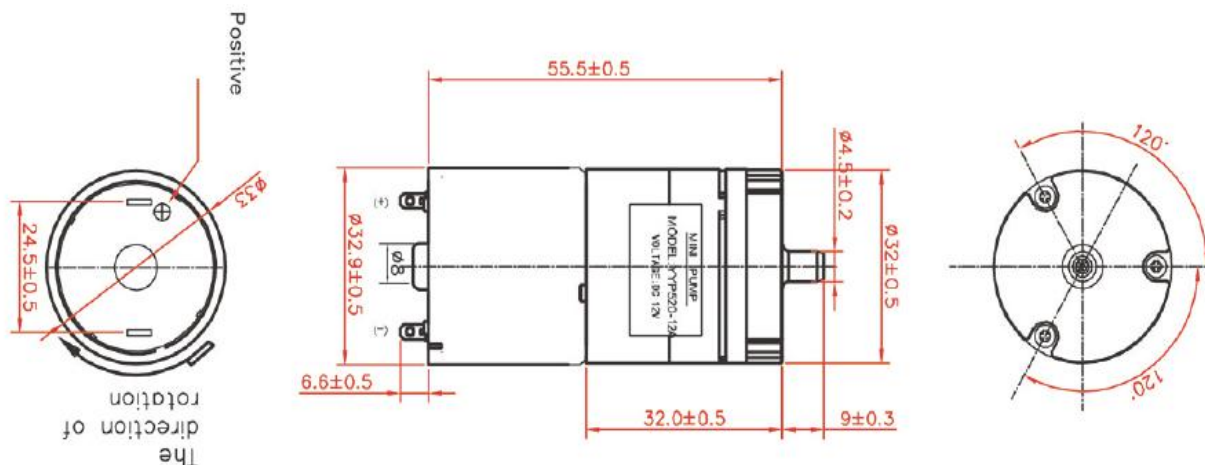

三、产品规格 Product Specification:

额定电压 Rated Voltage	DC 12V
额定电流 Rated Current	$\leq 400\text{mA}$
流量 Air Flow	$\geq 3.5\text{LPM}$
最大压力 Maximum Pressuer	$\geq 80\text{Kpa}$
高压气密 Leakage	$\leq 3\text{mmHg/min}$ (300mmHg at 500cc tank)
再启动电压 Reartart voltage	$\leq \text{DC } 9.6\text{V}$
噪音 Noise	$\leq 65\text{dB}$ (30cm away)
寿命 Rated Life	≥ 30000 cycles



JMKV1-3A

微型气阀 Mini Air Valve


一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、眼保姆、鱼缸、咖啡机等充气产品。

Mainly used for electronic sphygmomanometer, massage, blood pressure monitor, eye nanny, fish tank, coffee maker and other equipment products.



二、产品尺寸 Product Dimension:

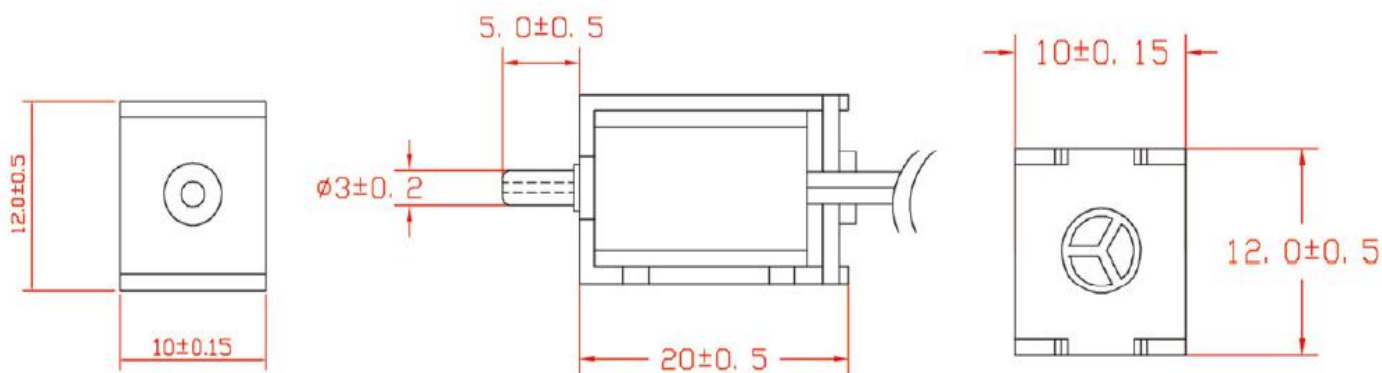

三、产品规格 Product Specification:

额定电压 Rated Voltage	DC 3V
额定电流 Rated Current	75mA
额定功率 Rated power consumption	0.225W
额定压力 Common pressure	300mmHg
气密 Leakage	≤3mmHg/min (300mmHg)
排气速度 Exhaust speed (300~15mmHg)	≤4sec
最低启动电压 Reatart voltage	DC 2.0V
绝缘电压 Dielectric Withstand	500V/MIN
寿命 Rated Life	≥30000 cycles

JMKV1-3C

微型气阀 Mini Air Valve




一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、眼保姆、鱼缸、咖啡机等充气产品。

Mainly used for electronic sphygmomanometer, massage, blood pressure monitor, eye nanny, fish tank, coffee maker and other equipment products.

二、产品尺寸 Product Dimension:

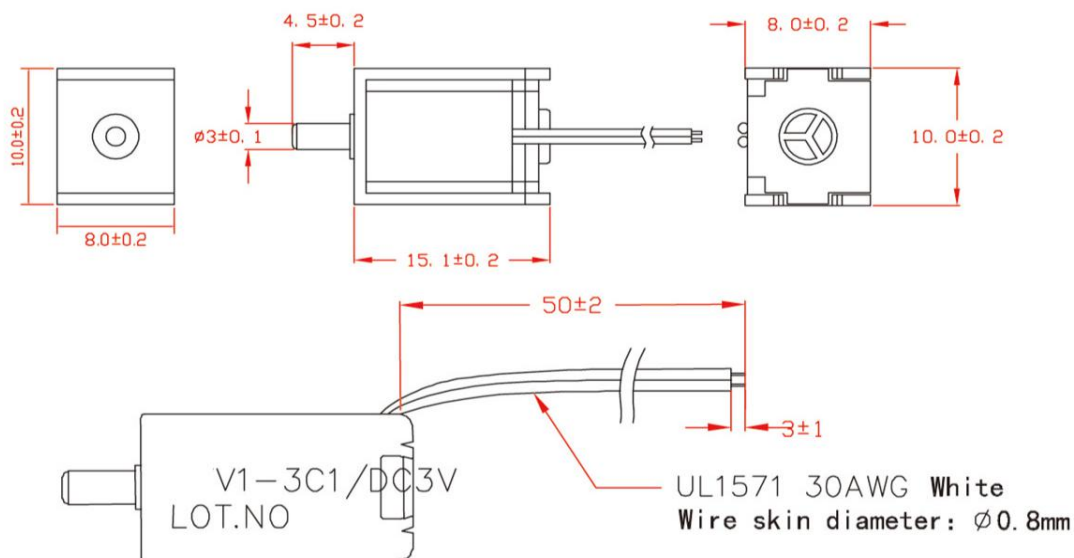

三、产品规格 Product Specification:

额定电压 Rated Voltage	DC 3V
额定电流 Rated Current	100mA
额定功率 Rated power consumption	0.3W
额定压力 Common pressure	300mmHg
气密 Leakage	≤3mmHg/min (300mmHg)
排气速度 Exhaust speed (300~15mmHg)	≤4sec
最低启动电压 Reartart voltage	DC 2.0V
绝缘电压 Dielectric Withstand	500V/MIN
寿命 Rated Life	≥30000 cycles

JMKV1-6B

微型气阀 Mini Air Valve


一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、眼保姆、鱼缸、咖啡机等充气产品。

Mainly used for electronic sphygmomanometer, massage, blood pressure monitor, eye nanny, fish tank, coffee maker and other equipment products.



二、产品尺寸 Product Dimension:

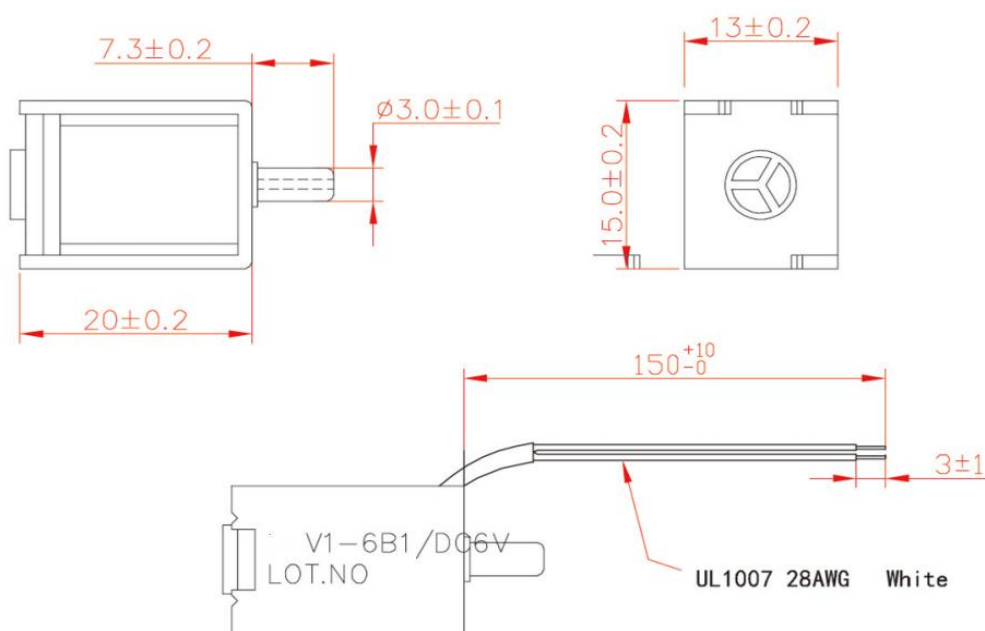

三、产品规格 Product Specification:

额定电压 Rated Voltage	DC 6V
额定电流 Rated Current	60mA
额定功率 Rated power consumption	0.36W
额定压力 Common pressure	300mmHg
气密 Leakage	$\leq 3\text{mmHg/min}$ (300mmHg)
排气速度 Exhaust speed (300~15mmHg)	$\leq 4\text{sec}$
最低启动电压 Reatart voltage	DC 2.0V
绝缘电压 Dielectric Withstand	500V/MIN
寿命 Rated Life	≥ 30000 cycles

JMKV1-6H

微型气阀 Mini Air Valve


一、产品应用 Product Applications:

主要用于吸奶器、按摩器、吸鼻涕器等充气产品。

Mainly used for breast pump, massage, breathe in nasal mucus and other equipment products.



二、产品尺寸 Product Dimension:

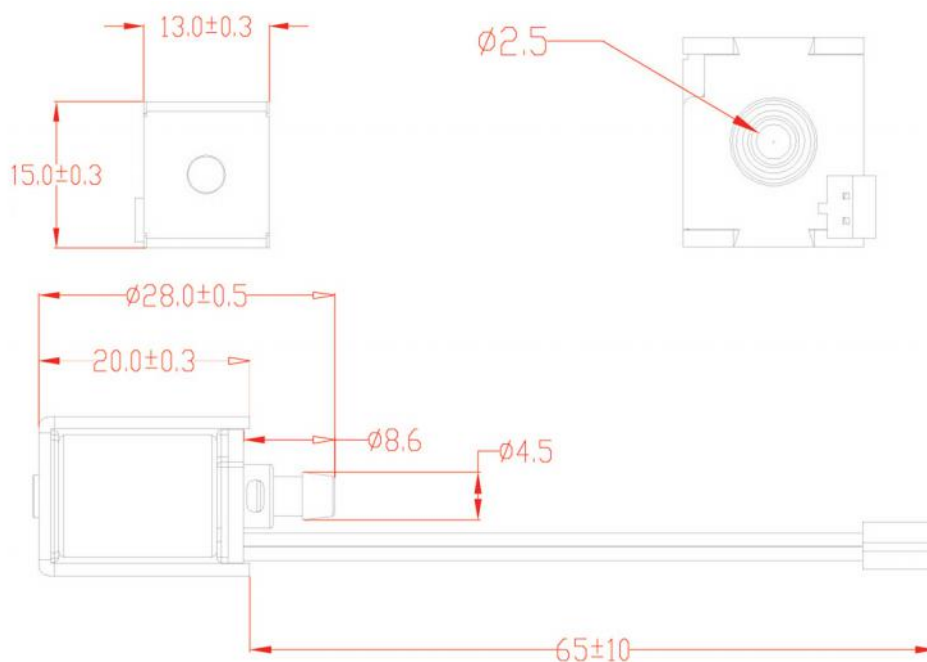

三、产品规格 Product Specification:

额定电压 Rated Voltage	DC 6V
额定电流 Rated Current	350mA
额定功率 Rated power consumption	2.1W
额定压力 Common pressure	-50KPa
高压气密 Leakage	≤3mmHg/min (300mmHg)
排气速度 Exhaust speed (300~15mmHg)	≤1sec
最低启动电压 Reartart voltage	DC 4.0V
绝缘电压 Dielectric Withstand	500V/MIN
寿命 Rated Life	≥200000 cycles

JMKV1-6D1

微型气阀 Mini Air Valve




一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、眼保姆、鱼缸、咖啡机等充气产品。

Mainly used for electronic sphygmomanometer, massage, blood pressure monitor, eye nanny, fish tank, coffee maker and other equipment products.

二、产品尺寸 Product Dimension:

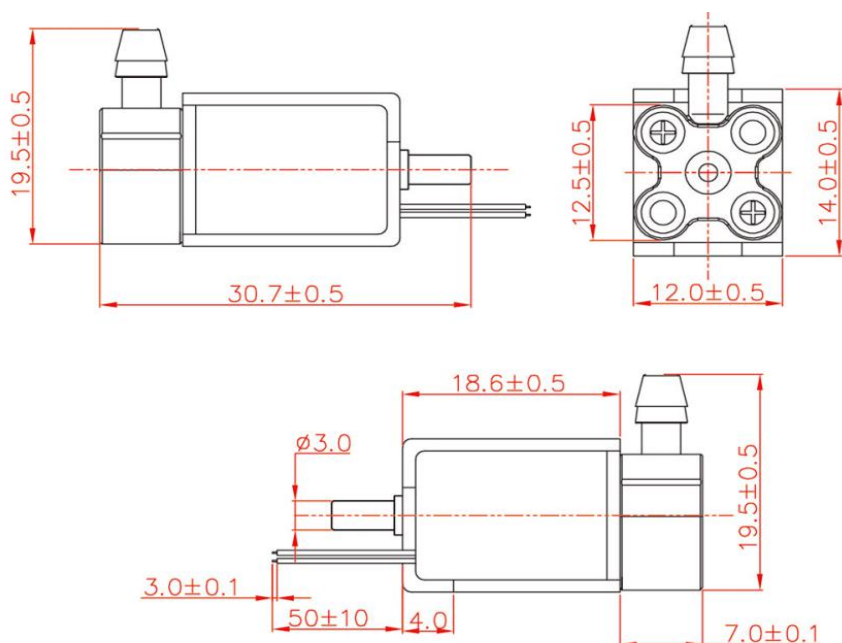

三、产品规格 Product Specification:

额定电压 Rated Voltage	DC 6V
额定电流 Rated Current	240mA
额定功率 Rated power consumption	1.44W
额定压力 Common pressure	300mmHg
气密 Leakage	$\leq 3\text{mmHg/min}$ (300mmHg)
排气速度 Exhaust speed (300~15mmHg)	$\leq 4\text{sec}$
最低启动电压 Reatart voltage	DC 3.5V
绝缘电压 Dielectric Withstand	500V/MIN
寿命 Rated Life	≥ 30000 cycles

JMKV1-6D2

微型气阀 Mini Air Valve




一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、眼保姆、鱼缸、咖啡机等充气产品。

Mainly used for electronic sphygmomanometer, massage, blood pressure monitor, eye nanny, fish tank, beer and other equipment products.

二、产品尺寸 Product Dimension:

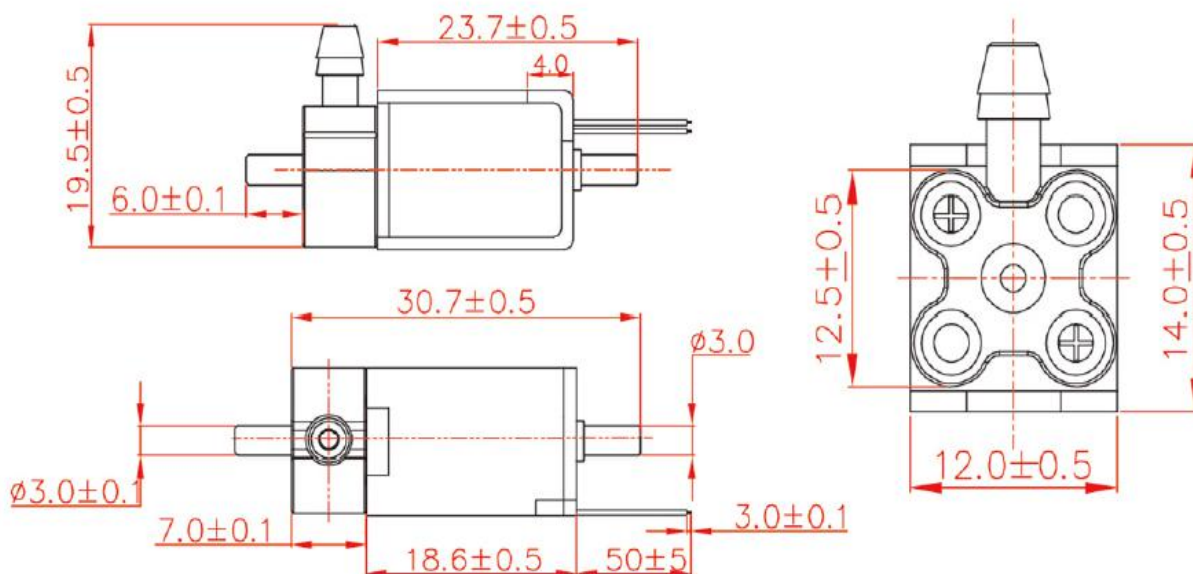


三、产品规格 Product Specification:

额定电压 Rated Voltage	DC 6V
额定电流 Rated Current	240mA
额定功率 Rated power consumption	1.44W
额定压力 Common pressure	300mmHg (300mmHg)
气密 Leakage	$\leq 3\text{mmHg/min}$
排气速度 Exhaust speed (300~15mmHg)	$\leq 4\text{sec}$
最低启动电压 Restart voltage	DC 3.5V
绝缘电压 Dielectric Withstand	500V/MIN
寿命 Rated Life	≥ 30000 cycles



JMKV3WA-12A

微型气阀 Mini Air Valve

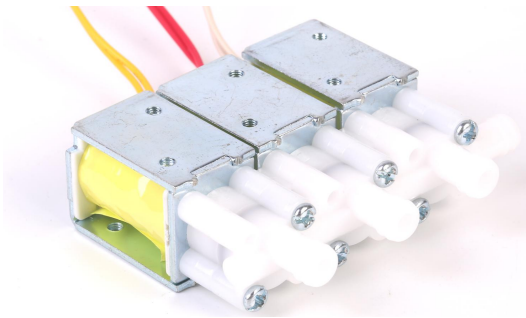


一、产品应用 Product Applications:

主要用于医疗设备，实验室，环境处理和按摩器等充气产品。

Mainly used for Medical device, Laboratory Environmental solutions, massages and other equipment products.

二、产品尺寸 Product Dimension:

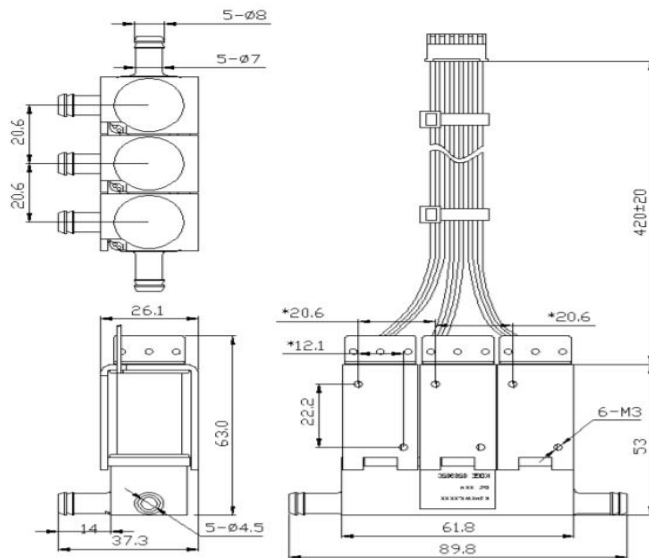

三、产品规格 Product Specification:

额定电压 Rated Voltage	DC 12V
额定电流 Rated Current	420mA
额定功率 Rated power consumption	1.68(w)*3
额定压力 Common pressure	300mmHg
最大压力 Max pressure	350mmHg
气密 Leakage	≤15mmHg/min
排气速度 Exhaust speed (300~15mmHg)	≤4sec
最低启动电压 Reatart voltage	DC 10.5V
寿命 Rated Life	≥500000 cycles


*Remark: The actual performances would vary based on the test conditions and the environment of users.

Web: www.jmakerpump.com

Add: Unit 306, NO.5 Building CATIC Industrial Zone, NO.1 Huli Ave, Xiamen China

JMKV4WA-12A

微型气阀 Mini Air Valve

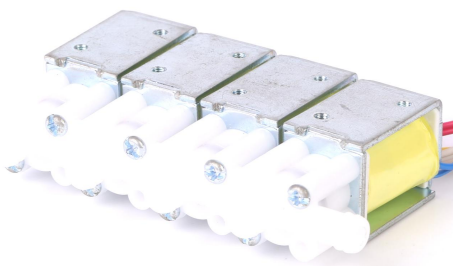


一、产品应用 Product Applications:

主要用于医疗设备，实验室，环境处理和按摩器等充气产品。

Mainly used for Medical device, Laboratory Environmental solutions, massages and other equipment products.

二、产品尺寸 Product Dimension:

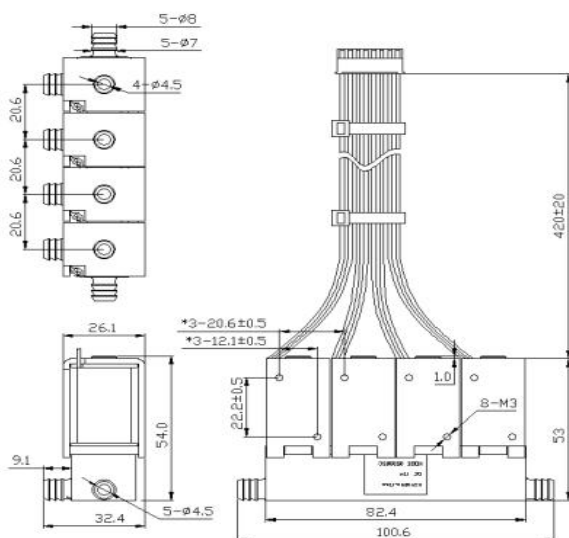

三、产品规格 Product Specification:

额定电压 Rated Voltage	DC 12V
额定电流 Rated Current	560mA
额定功率 Rated power consumption	1.68W*4
额定压力 Common pressure	300mmHg
最大压力 Max pressure	350mmHg
气密 Leakage	≤15mmHg/min
排气速度 Exhaust speed (300~15mmHg)	≤4sec
最低启动电压 Reartart voltage	DC 10.5V
寿命 Rated Life	≥500000 cycles

*Remark: The actual performances would vary based on the test conditions and the environment of users.


JMKV8WA-12A

微型气阀 Mini Air Valve


一、产品应用 Product Applications:

主要用于按摩器等充气产品。

Mainly used for massage and other equipment products.

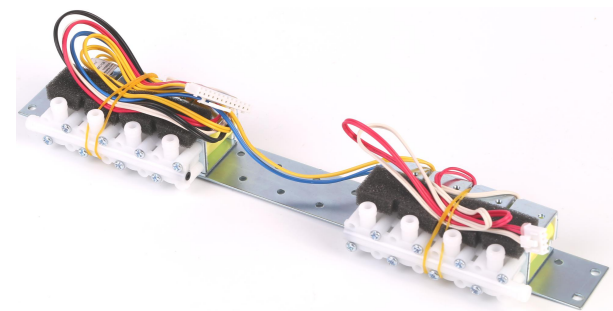

二、产品尺寸 Product Dimension:

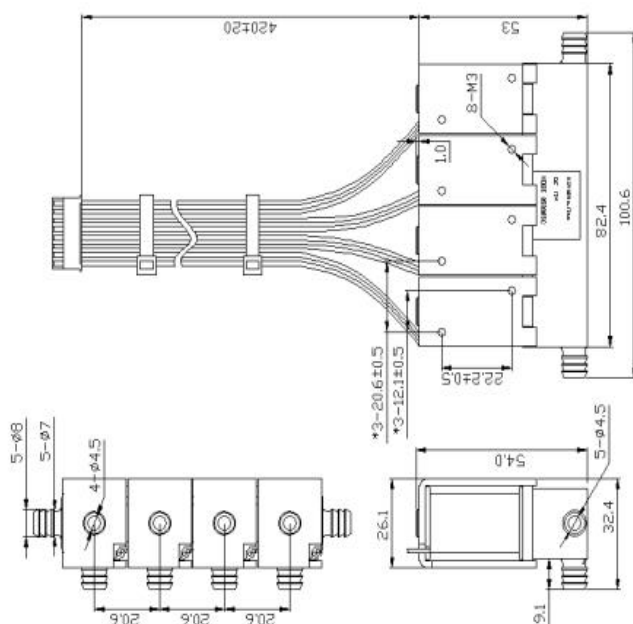

三、产品规格 Product Specification:

额定电压 Rated Voltage	DC 12V
额定电流 Rated Current	140mA
额定功率 Rated power consumption	1.70W*8
额定压力 Common pressure	300mmHg
气密 Leakage	≤15mmHg/min
排气速度 Exhaust speed (300~15mmHg)	≤4sec
最低启动电压 Reartart voltage	DC 10.5V
寿命 Rated Life	≥500000 cycles
备注Remark:	6V& 24V DC are all available