




JMKP030-3A1

微型气泵 Mini Air Pump


一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、眼保姆、鱼缸、咖啡机等充气产品。

Mainly used for electronic sphygmomanometer, massager, blood pressure monitor, eye nanny, fish tank, coffee maker and other equipment products.

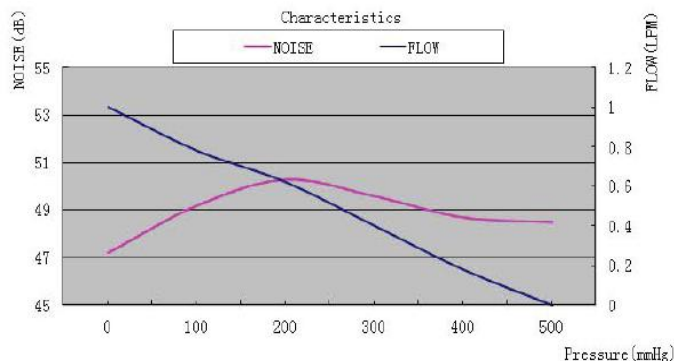

二、产品尺寸 Product Dimension:

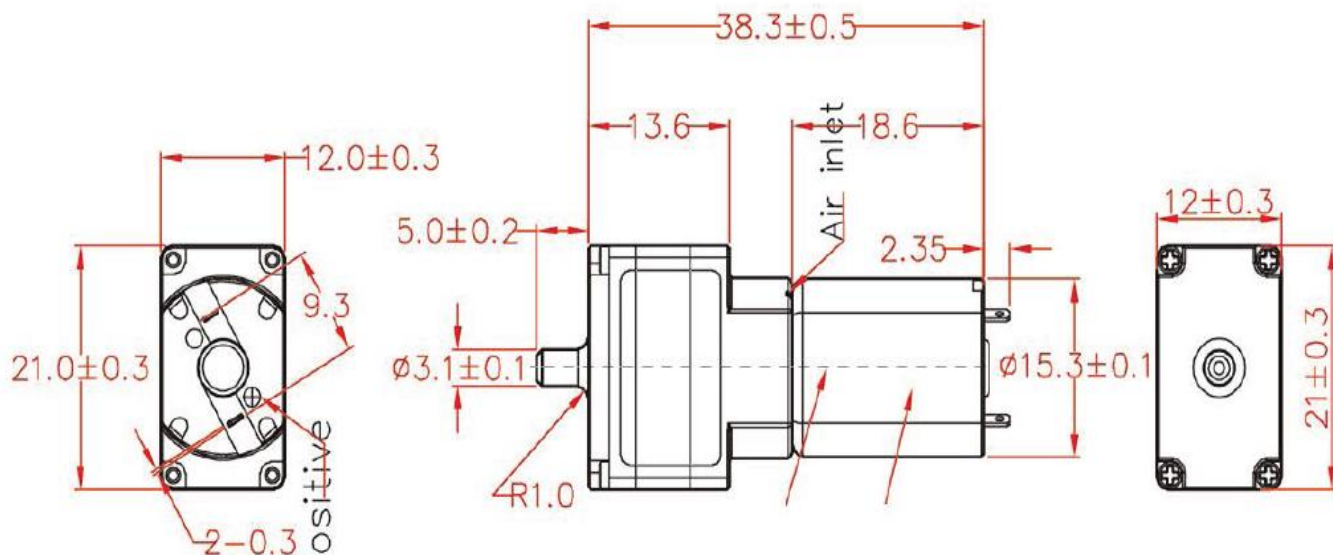

三、产品规格 Product Specification:

型号 Model	JMKP030-3A1		
额定电压 Rated Voltage	DC 1.5V	DC 3V	DC 6V
额定电流 Rated Current	≤700mA	≤350mA	≤180mA
进气口外径 Air Tap O.D.	Φ3.1mm		
流量 Air Flow	≥0.7LPM		
充气时间 Inflation Time	≤8sec (From 0 to 300mmHg in a 100cc tank)		
最大压力 Maximum Pressuer	≥350mmHg		
气密性 Leakage	≤3mmHg/min from 300mmHg in a 100cc tank		
噪音 Noise	≤60dB (30cm away)		
寿命 Rated Life	≥200Hours		
重量 Weight	14g		



伽太科技(厦门)有限公司
JETMAKER (Xiamen) Fluid Equipment Co.,LTD


JMKP32VPM

微型气泵 Mini Air Pump


一、产品应用 Product Applications:

主要用于按摩椅、按摩器、气垫床等充气产品。

Mainly used for air massage chair, massager, air mattress and other equipment products.

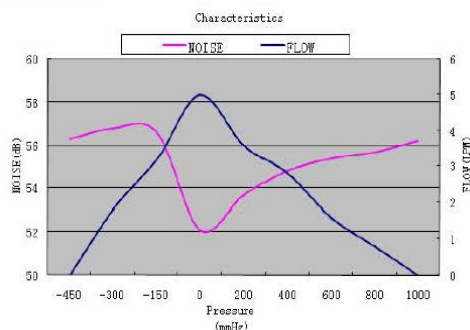

二、产品尺寸 Product Dimension:

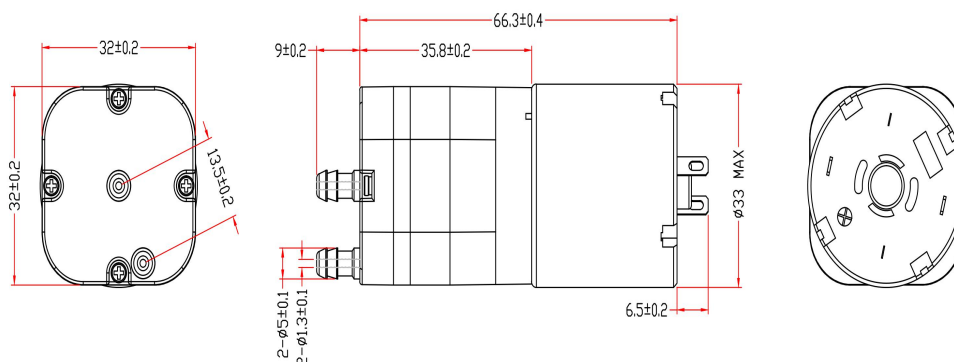

三、产品规格 Product Specification:

型号 Model	JMKP32VPM		
额定电压 Rated Voltage	DC 6V	DC 12V	DC 24V
额定电流 Rated Current	≤800mA	≤400mA	≤220mA
功率 Power	4.8W		
流量 Air Flow	≥4.0LPM		
充气时间 Inflation Time	≤5sec (From 0 to 300mmHg in a 500cc tank)		
最大正压 Maximum Positive Pressuer	≥900mmHg		
最大负压 Maximum Negative Pressuer	≤ -56Kpa(-420mmHg)		
气密性 Leakage	≤5mmHg/min from 300mmHg in a 500cc tank		
噪音 Noise	≤55dB (30cm away)		
寿命 Rated Life	≥600 hours		
重量 Weight	88g		

Web: www.jmakerpump.com

Add: 6D, Bilida Building, No.22 Lvling Road, Siming District,Xiamen China



伽太科技(厦门)有限公司
JETMAKER (Xiamen) Fluid Equipment Co.,LTD


JMKP40APM

微型气泵 Mini Air Pump


一、产品应用 Product Applications:

主要用于按摩椅、按摩器、气垫床等充气产品。

Mainly used for air massage chair, massager, air mattress and other equipment products.

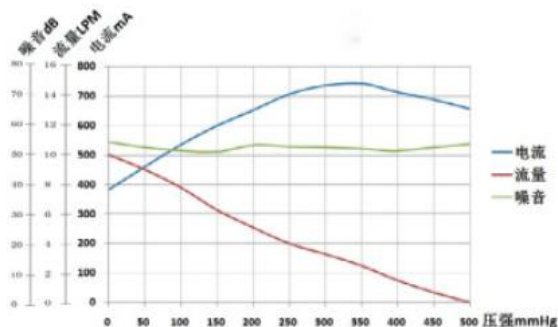

二、产品尺寸 Product Dimension:

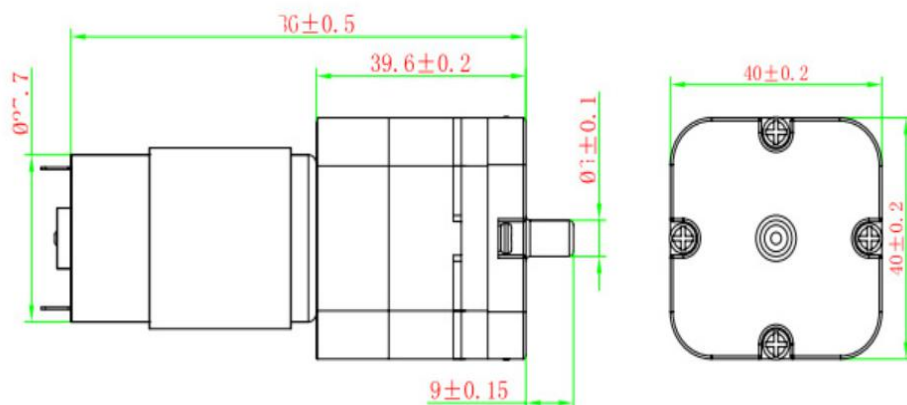

三、产品规格 Product Specification:

型号 Model	JMKP40APM		
额定电压 Rated Voltage	DC 6V	DC 12V	DC 24V
额定电流 Rated Current	≤1000mA	≤800mA	≤220mA
功率 Power	6W		
流量 Air Flow	≥8.0LPM		
充气时间 Inflation Time	≤5sec (From 0 to 300mmHg in a 500cc tank)		
最大正压 Maximum Positive Pressuer	≥750mmHg		
气密性Leakage	≤15mmHg/min from 300mmHg in a 500cc tank		
噪音 Noise	≤55dB (30cm away)		
寿命 Rated Life	≥600 hours		
重量 Weight	88g		

Web: www.jmakerpump.com

Add: 6D, Bilida Building, No.22 Lvling Road, Siming District,Xiamen China




JMKP60-12A1

微型气泵 Mini Air Pump


一、产品应用 Product Applications:

主要用于按摩器、眼保姆、足浴盆、汽车按摩椅等充气产品。

Mainly used for massager, eye nanny, foot tub, massage chair and other equipment products.

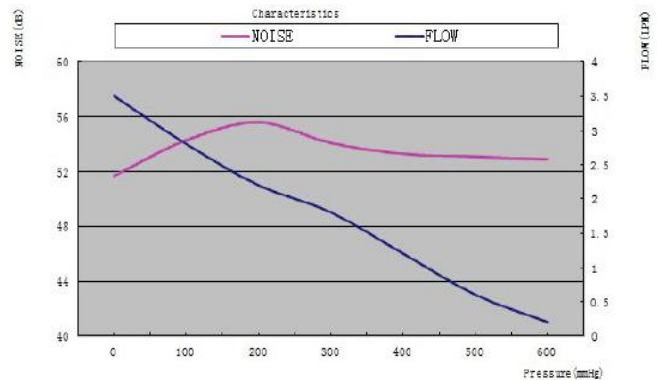

二、产品尺寸 Product Dimension:

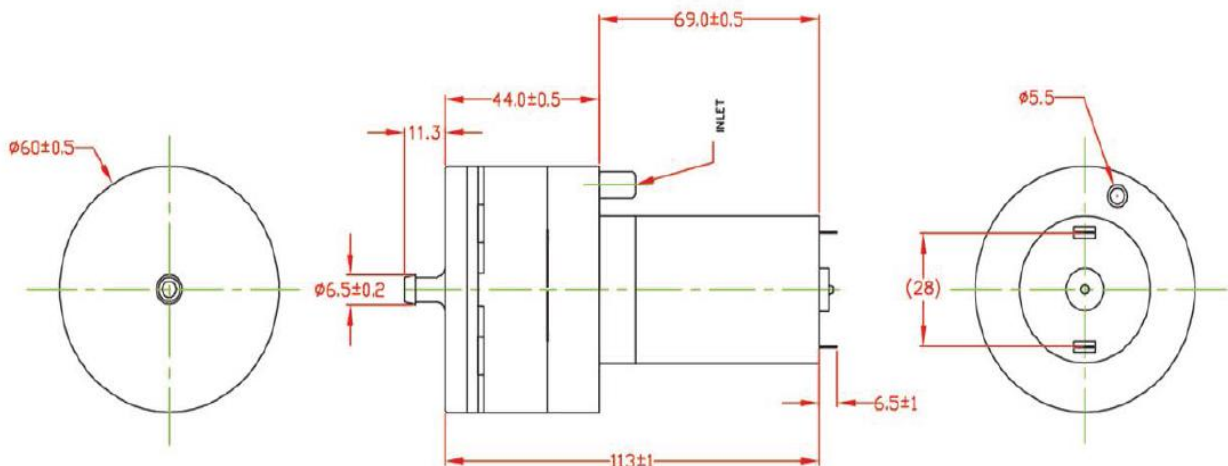

三、产品规格 Product Specification:

型号 Model	JMKP60-12A1			
额定电压 Rated Voltage	DC 6V	DC 9V	DC 12V	DC 24V
额定电流 Rated Current	$\leq 3000\text{mA}$	$\leq 2000\text{mA}$	$\leq 1500\text{mA}$	$\leq 750\text{mA}$
进气口外径 Air Tap O.D.	$\Phi 6.5\text{mm}$			
流量 Air Flow	$\geq 10.0\text{LPM}$			
充气时间 InflationTime	$\leq 3\text{sec}$ (From 0 to 300mmHg in a 500cc tank)			
最大正压 Maximum Pressuer	$\geq 600\text{mmHg}$			
最大负压 Maximum Negative Pressuer	$\leq -375\text{mmHg}$			
气密性 Leakage	$\leq 15\text{mmHg/min}$ from 300mmHg in a 500cc tank			
噪音 Noise	$\leq 65\text{dB}$ (30cm away)			
寿命 Rated Life	≥ 600 Hours			
重量 Weight	290g			




微型气泵 Mini Air Pump



主要用于按摩椅、按摩器、气垫床等充气产品。

Mainly used for air massage chair, massager, air mattress and other equipment products.

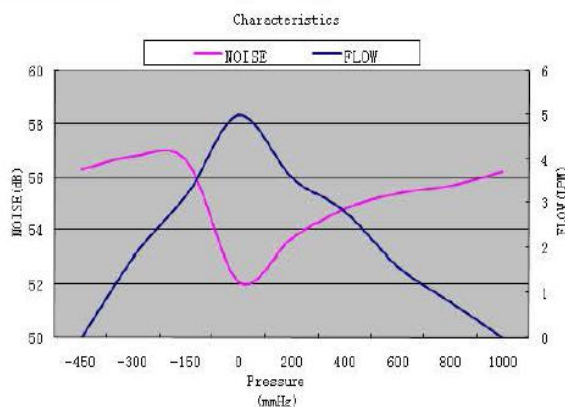

二、产品尺寸 Product Dimension:



型号 Model	JMKP095-12B			
额定电压 Rated Voltage	DC 6V	DC 9V	DC 12V	DC 24V
额定电流 Rated Current	≤1000mA	≤660mA	≤500mA	≤250mA
功率 Power	6W			
流量 Air Flow	≥4.5LPM			
充气时间 Inflation Time	≤5sec (From 0 to 300mmHg in a 500cc tank)			
最大正压 Maximum Positive Pressuer	≥90Kpa(700mmHg)			
最大负压 Maximum Negative Pressuer	≤ -56Kpa(-420mmHg)			
气密性Leakage	≤10mmHg/min from 300mmHg in a 500cc tank			
噪音 Noise	≤65dB (30cm away)			
寿命 Rated Life	≥600 hours			
重量 Weight	88g			




JMKP370-6B1

微型气泵 Mini Air Pump


一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、眼保姆、鱼缸、智能吸尘器等充气产品。

Mainly used for electronic sphygmomanometer, massager, blood pressure monitor, eye nanny, fish tank, intelligent cleaner and other equipment products.

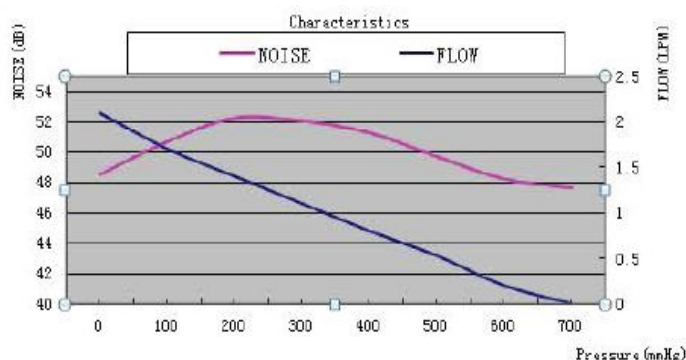

二、产品尺寸 Product Dimension:

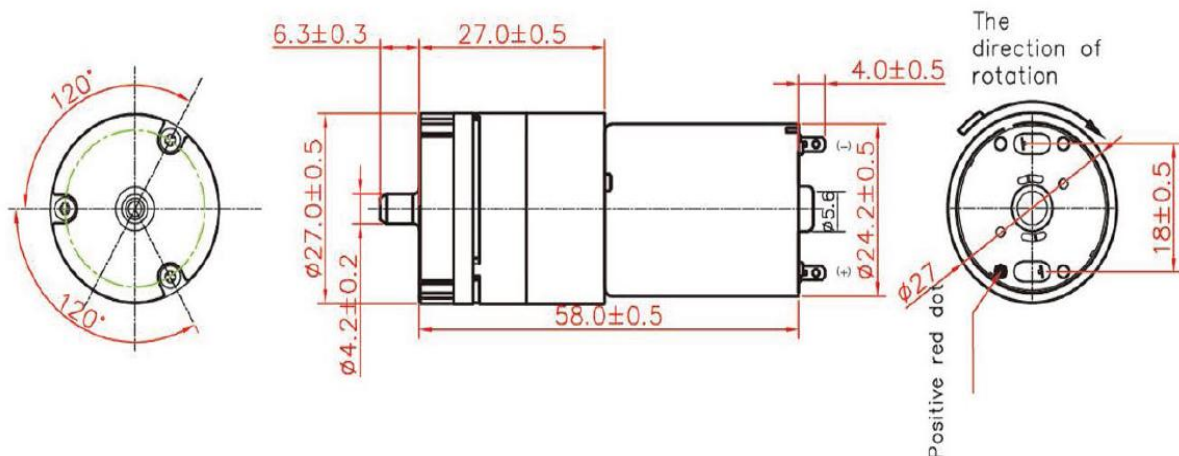

三、产品规格 Product Specification:

型号 Model	JMKP370-6B1				
额定电压 Rated Voltage	DC 3V	DC 6V	DC 9V	DC 12V	DC 24V
额定电流 Rated Current	≤840mA	≤420mA	≤280mA	≤210mA	≤105mA
进气口外径 Air Tap O.D.	Φ4.2mm				
出气口内径 Air Tap I.D.	Φ1.5mm				
流量 Air Flow	≥2.0LPM				
充气时间 Inflation Time	≤10sec (From 0 to 300mmHg in a 500cc tank)				
最大压力 Maximum Pressuer	≥400mmHg				
气密性 Leakage	≤3mmHg/min from 300mmHg in a 500cc tank				
噪音 Noise	≤60dB (30cm away)				
寿命 Rated Life	≥500 Hours				
重量 Weight	60g				




JMKP370-6B2

微型气泵 Mini Air Pump


一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、眼保姆、鱼缸、智能吸尘器等充气产品。

Mainly used for electronic sphygmomanometer, massager, blood pressure monitor, eye nanny, fish tank, intelligent cleaner and other equipment products.

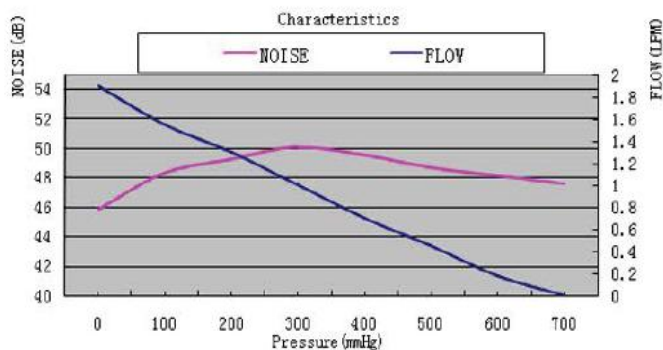

二、产品尺寸 Product Dimension:

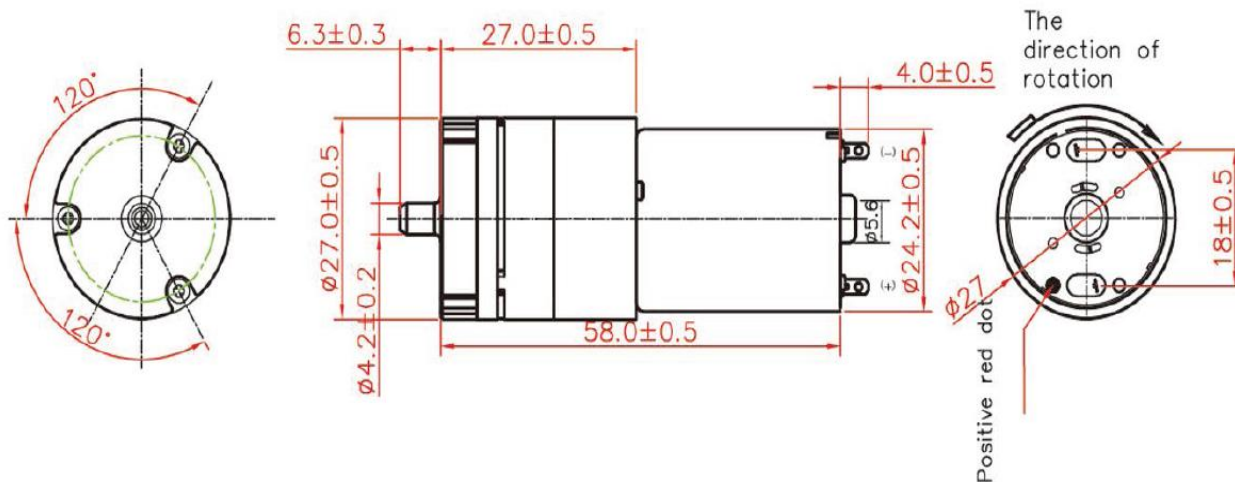

三、产品规格 Product Specification:

型号 Model	JMKP370-6B2				
额定电压 Rated Voltage	DC 3V	DC 6V	DC 9V	DC 12V	DC 24V
额定电流 Rated Current	$\leq 800\text{mA}$	$\leq 400\text{mA}$	$\leq 260\text{mA}$	$\leq 190\text{mA}$	$\leq 90\text{mA}$
进气口外径 Air Tap O.D.	$\phi 4.2\text{mm}$				
出气口内径 Air Tap I.D.	$\phi 1.5\text{mm}$				
流量 Air Flow	$\geq 1.8\text{LPM}$				
充气时间 Inflation Time	$\leq 12\text{sec}$ (From 0 to 300mmHg in a 500cc tank)				
最大压力 Maximum Pressuer	$\geq 400\text{mmHg}$				
气密性 Leakage	$\leq 3\text{mmHg/min}$ from 300mmHg in a 500cc tank				
噪音 Noise	$\leq 55\text{dB}$ (30cm away)				
寿命 Rated Life	≥ 500 Hours				
重量 Weight	60.5g				



JMKP370-6J2


微型气泵 Mini Air Pump




一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、眼保姆、鱼缸、智能吸尘器等充气产品。

Mainly used for electronic sphygmomanometer, massager, blood pressure monitor, eye nanny, fish tank, intelligent cleaner and other equipment products.

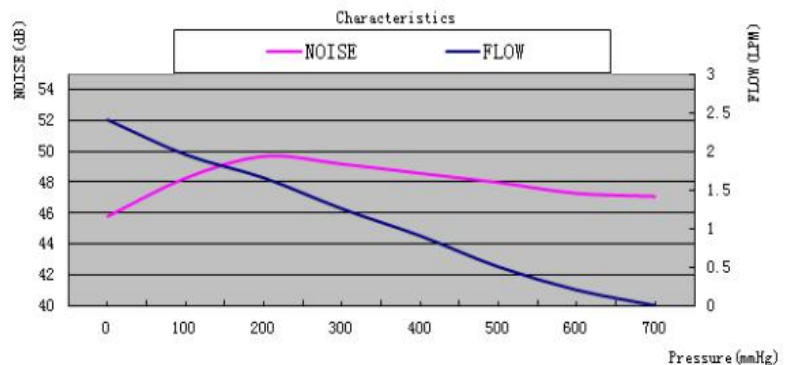

二、产品尺寸 Product Dimension:

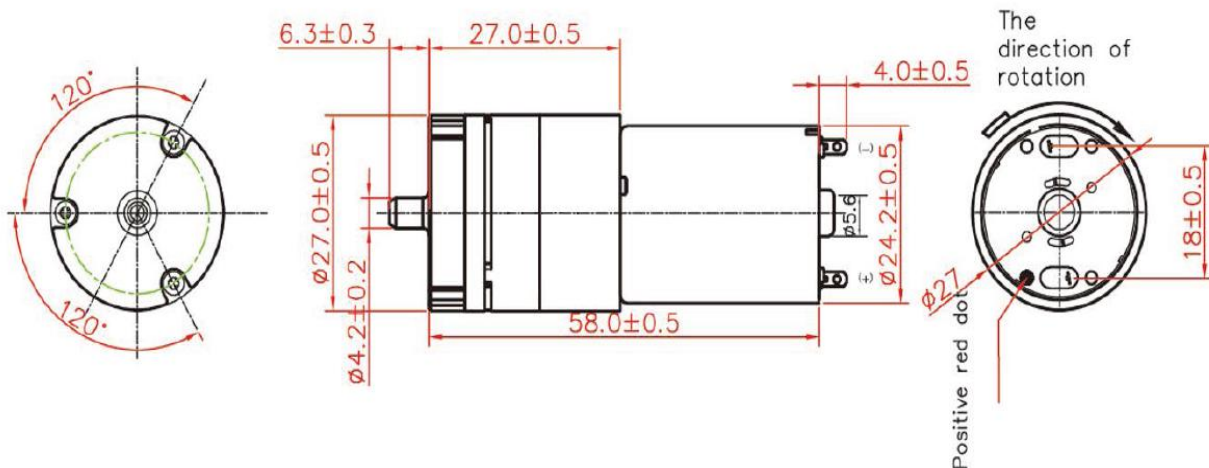

三、产品规格 Product Specification:

型号 Model	JMKP370-6J2				
额定电压 Rated Voltage	DC 3V	DC 6V	DC 9V	DC 12V	DC 24V
额定电流 Rated Current	≤700mA	≤350mA	≤230mA	≤175mA	≤100mA
进气口外径 Air Tap O.D.	Φ4.2mm				
出气口内径 Air Tap I.D.	Φ1.8mm				
流量 Air Flow	≥2.4LPM				
充气时间 InflationTime	≤12sec (From 0 to 300mmHg in a 500cc tank)				
最大压力 Maximum Pressuer	≥400mmHg				
气密性 Leakage	≤3mmHg/min from 300mmHg in a 500cc tank				
噪音 Noise	≤55dB (30cm away)				
寿命 Rated Life	≥500 Hours				
重量 Weight	60g				



伽太科技(厦门)有限公司

JETMAKER (Xiamen) Fluid Equipment Co.,LTD


JMKP520-12A

微型气泵 Mini Air Pump


一、产品应用 Product Applications:

主要用于按摩器、眼保姆、足浴盆、汽车按摩椅等充气产品。

Mainly used for massager, eye nanny, foot tub, massage chair and other equipment products.

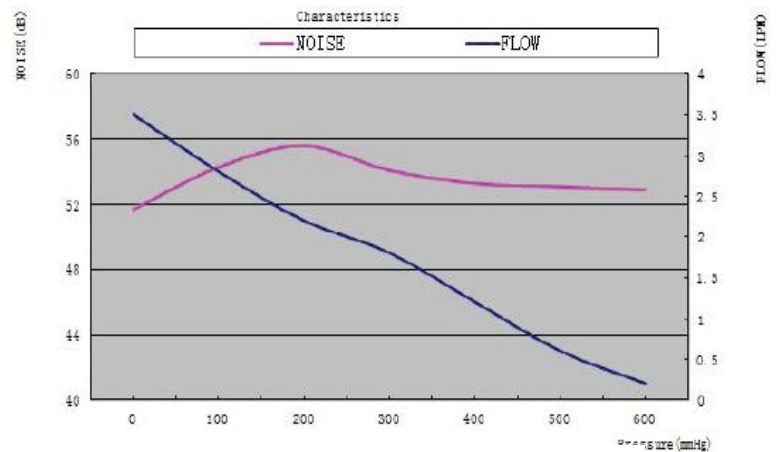

二、产品尺寸 Product Dimension:

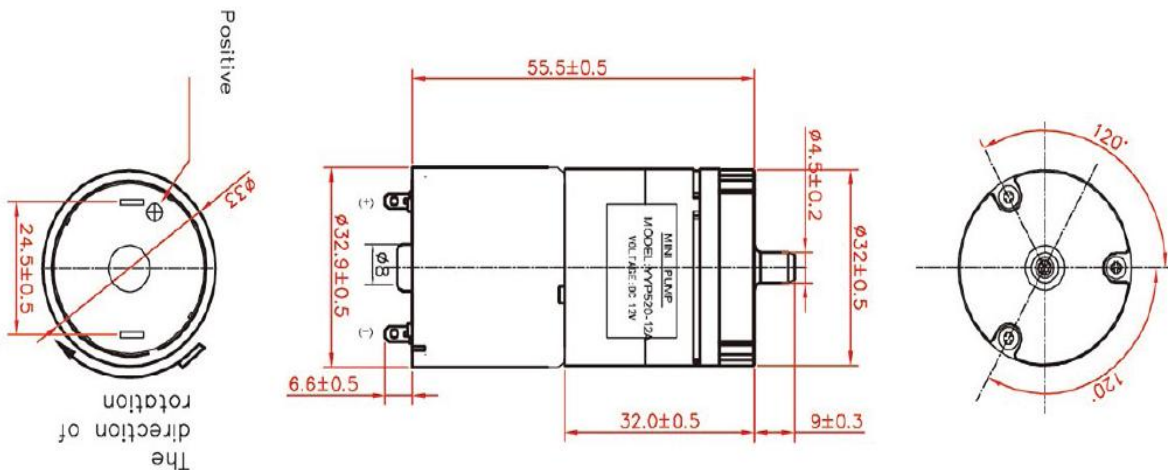

三、产品规格 Product Specification:

型号 Model	JMKP520-12A				
额定电压 Rated Voltage	DC 3V	DC 6V	DC 9V	DC 12V	DC 24V
额定电流 Rated Current	≤1400mA	≤700mA	≤470mA	≤350mA	≤175mA
进气口外径 Air Tap O.D.	Φ4.5mm				
流量 Air Flow	≥3.0LPM				
充气时间 InflationTime	≤6sec (From 0 to 300mmHg in a 500cc tank)				
最大压力 Maximum Pressuer	≥500mmHg				
高压气密(300mmHg) Leakage	≤10mmHg/min from 300mmHg in a 500cc tank				
噪音 Noise	≤65dB (30cm away)				
寿命 Rated Life	≥500 Hours				
重量 Weight	73g				

Web: www.jmakerpump.com

Add: 6D, Bilida Building, No.22 Lvling Road, Siming District,Xiamen China



JMKP370-6E4


微型真空泵 Mini Vacuum Pump






一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、吸鼻涕器、臭氧发生器、电饭煲等充气产品。

Mainly used for electronic sphygmomanometer, massager, blood pressure monitor, breathe in nasal mucus, ozone generator, electric rice cooker and other equipment products.

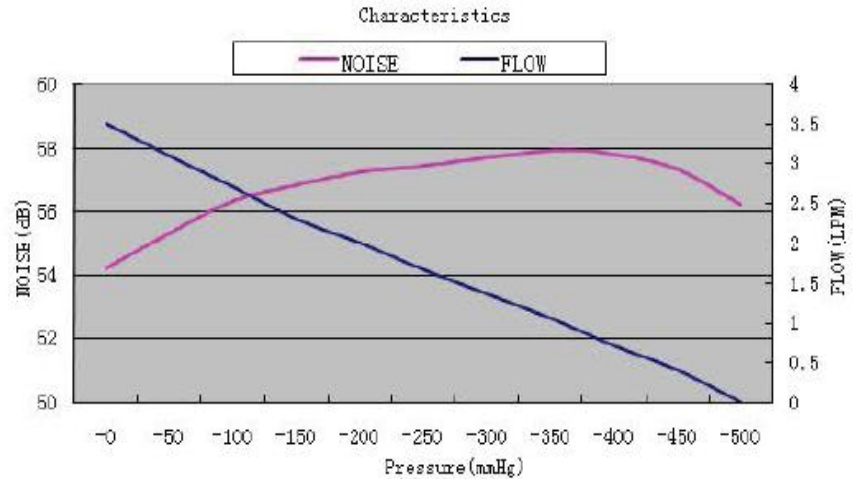

二、产品尺寸 Product Dimension:

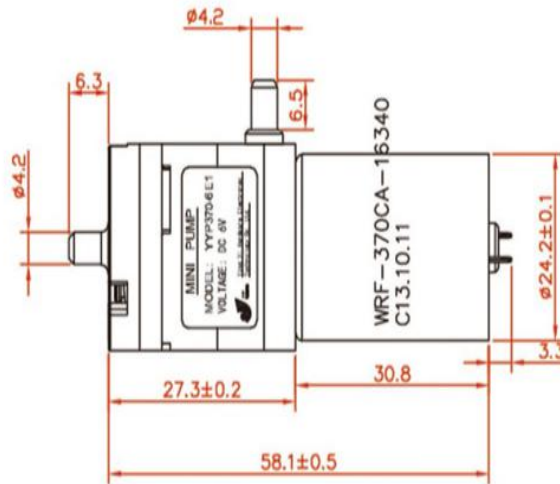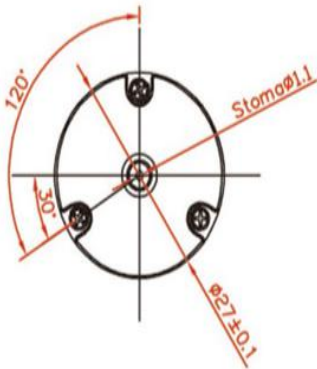

三、产品规格 Product Specification:

型号 Model	JMKP370-6E4				
额定电压 Rated Voltage	DC 3V	DC 6V	DC 9V	DC 12V	DC 24V
额定电流 Rated Current	≤1300mA	≤700mA	≤400mA	≤300mA	≤200mA
流量 Air Flow	≥3.0LPM				
最大压力 Maximum Vacuum	≤-56KPa(-420mmHg)				
噪音 Noise	≤65dB (30cm away)				
寿命 Rated Life	≥500 Hours				
重量 Weight	61g				



JMKP370-6K1


微型真空泵 Mini Vacuum Pump




一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、吸鼻涕器、臭氧发生器、电饭煲等充气产品。

Mainly used for electronic sphygmomanometer, massager, blood pressure monitor, breathe in nasal mucus, ozone generator, electric rice cooker and other equipment products.

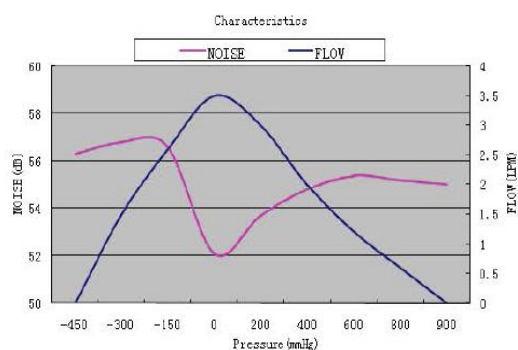

二、产品尺寸 Product Dimension:

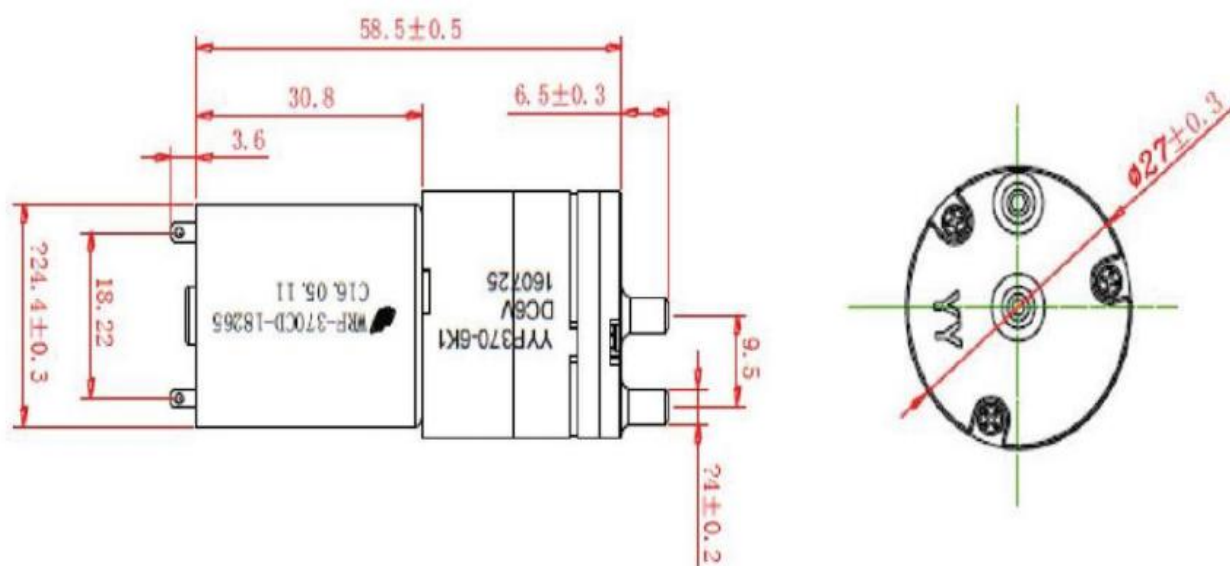

三、产品规格 Product Specification:

型号 Model	JMKP370-6K1				
额定电压 Rated Voltage	DC 3V	DC 6V	DC 9V	DC 12V	DC 24V
额定电流 Rated Current	≤1000mA	≤500mA	≤330mA	≤250mA	≤125mA
进气口外径 Air Tap O.D.	Φ4mm				
流量 Air Flow	≥3.0LPM				
最大正压 Maximum Pressuer	≥60KPa(450mmHg)				
最大负压 Maximum Vacuum	≤-50KPa(-375mmHg)				
噪音 Noise	≤65dB (30cm away)				
寿命 Rated Life	≥500 Hours				
重量 Weight	61g				



伽太科技(厦门)有限公司
JETMAKER (Xiamen) Fluid Equipment Co.,LTD

JMKP27APW


微型水泵 Mini Water Pump




一、产品应用 Product Applications:

主要用于家用电器、便携饮水设备、咖啡机、加湿器、美容仪器等产品。

Mainly used for household appliances, portable drinking water equipment, coffee machine, humidifier, beauty instrument.

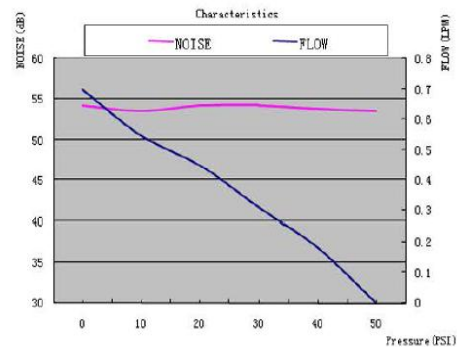

二、产品尺寸 Product Dimension:

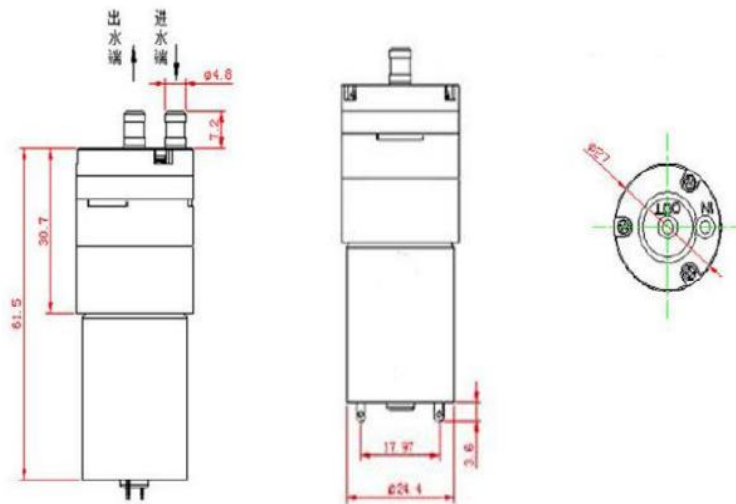

三、产品规格 Product Specification:

型号 Model	JMKP27APW				
额定电压 Rated Voltage	DC 3V	DC 6V	DC 9V	DC 12V	DC 24V
额定电流 Rated Current	≤1200mA	≤600mA	≤400mA	≤300mA	≤150mA
扬程 Pump Head	≥1m				
吸水高度 Suction Head	≥3m				
流量 Water Flow	0.5-0.7LPM				
最大压力 Maximum Water Pressuer	29-43.5PSI(200-300KPa)				
气密性 Leakage	20PSI NO leakage				
噪音 Noise	≤60dB (30cm away)				
寿命 Rated Life	≥500Hours(40s on; 20s off)				
重量 Weight	60g				

Web: www.jmakerpump.com

Add: 6D, Bilida Building, No.22 Lvling Road, Siming District,Xiamen China



JMKP370-12C1


微型水泵 Mini Water Pump




一、产品应用 Product Applications:

主要用于家用电器、便携饮水设备、咖啡机、加湿器、美容仪器等产品。

Mainly used for household appliances, portable drinking water equipment, coffee machine, humidifier, beauty instrument.

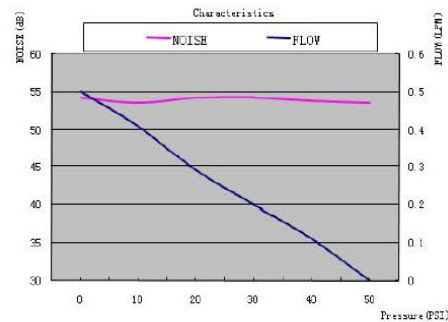

二、产品尺寸 Product Dimension:

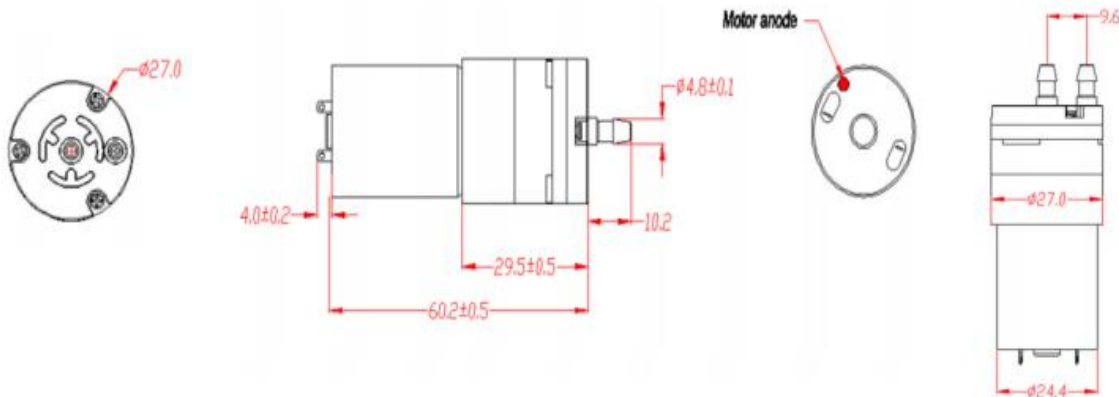

三、产品规格 Product Specification:

型号 Model	JMKP370-12C1				
额定电压 Rated Voltage	DC 3V	DC 6V	DC 9V	DC 12V	DC 24V
额定电流 Rated Current	≤1400mA	≤700mA	≤470mA	≤350mA	≤180mA
扬程 Pump Head	≥1m				
吸水高度 Suction Head	≥3m				
流量 Water Flow	0.3-0.5LPM				
最大压力 Maximum Water Pressuer	29-43.5PSI(200-300KPa)				
气密性 Leakage	20PSI NO leakage				
噪音 Noise	≤60dB (30cm away)				
寿命 Rated Life	≥500Hours(40s on; 20s off)				
重量 Weight	60g				



JMKP370-12C2


微型水泵 Mini Water Pump






一、产品应用 Product Applications:

主要用于家用电器、便携饮水设备、咖啡机、加湿器、美容仪器等产品。

Mainly used for household appliances, portable drinking water equipment, coffee machine, humidifier, beauty instrument.

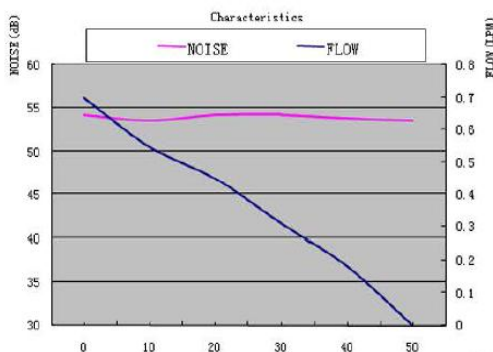

二、产品尺寸 Product Dimension:

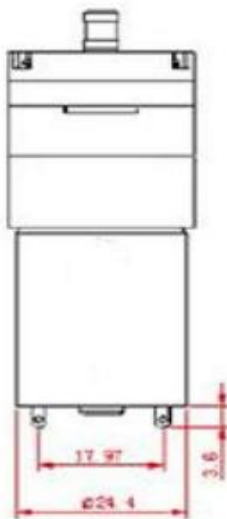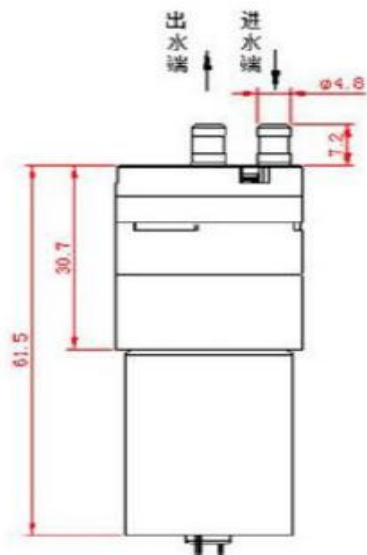

三、产品规格 Product Specification:

型号 Model	JMKP370-12C2				
额定电压 Rated Voltage	DC 3V	DC 6V	DC 9V	DC 12V	DC 24V
额定电流 Rated Current	≤1200mA	≤600mA	≤400mA	≤300mA	≤150mA
扬程 Pump Head	≥1m				
吸水高度 Suction Head	≥3m				
流量 Water Flow	0.5-0.7LPM				
最大压力 Maximum Water Pressuer	29-43.5PSI(200-300KPa)				
气密性 Leakage	20PSI NO leakage				
噪音 Noise	≤60dB (30cm away)				
寿命 Rated Life	≥500Hours(40s on; 20s off)				
重量 Weight	60g				
Web: www.jmakerpump.com		Add: 6D, Bilida Building, No.22 Lvling Road, Siming District,Xiamen China			



JMKV1-3A1

微型气阀 Mini Air Valve




一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、眼保姆、鱼缸、咖啡机等充气产品。

Mainly used for electronic sphygmomanometer, massage, blood pressure monitor, eye nanny, fish tank, coffee maker and other equipment products.

二、产品尺寸 Product Dimension:

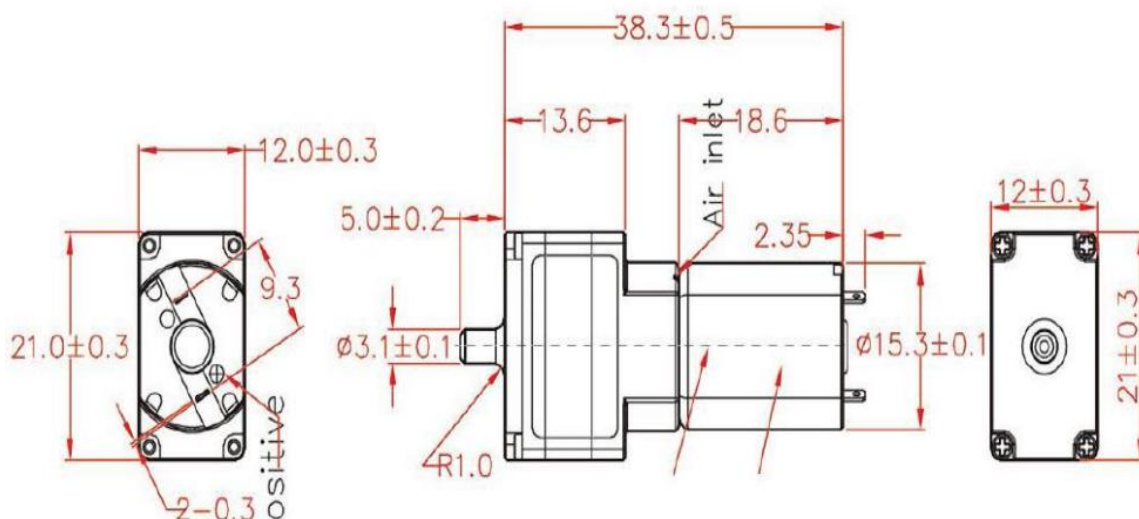

三、产品规格 Product Specification:

型号 Model	JMKV1-3A1	
额定电压 Rated Voltage	DC 3V	DC 6V
额定电流 Rated Current	75±10% mA	75±10% mA
直流阻抗 DC Resistance	40±10% Ω	80±10% Ω
进气口外径 Outlet O.D.	Φ3mm	
额定压力 Common pressure	300mmHg	
媒介 Medium	Air	
气密 Leakage	≤3mmHg/min (under 300mmHg in a 100cc tank)	
排气速度 Exhaust speed (300~15mmHg)	≤4sec(From 300 to 15mmHg in a 100cc tank))	
模式 Type	Normally Opened	
使用环境 Operation Temperature	0-50℃ / 30%-80% RH	
寿命 Rated Life	≥200000 cycles(ON 1s, OFF 1s)	
重量 Weight	10g	



JMKV1-3C1

微型气阀 Mini Air Valve




一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、眼保姆、鱼缸、咖啡机等充气产品。

Mainly used for electronic sphygmomanometer, massage, blood pressure monitor, eye nanny, fish tank, coffee maker and other equipment products.

二、产品尺寸 Product Dimension:

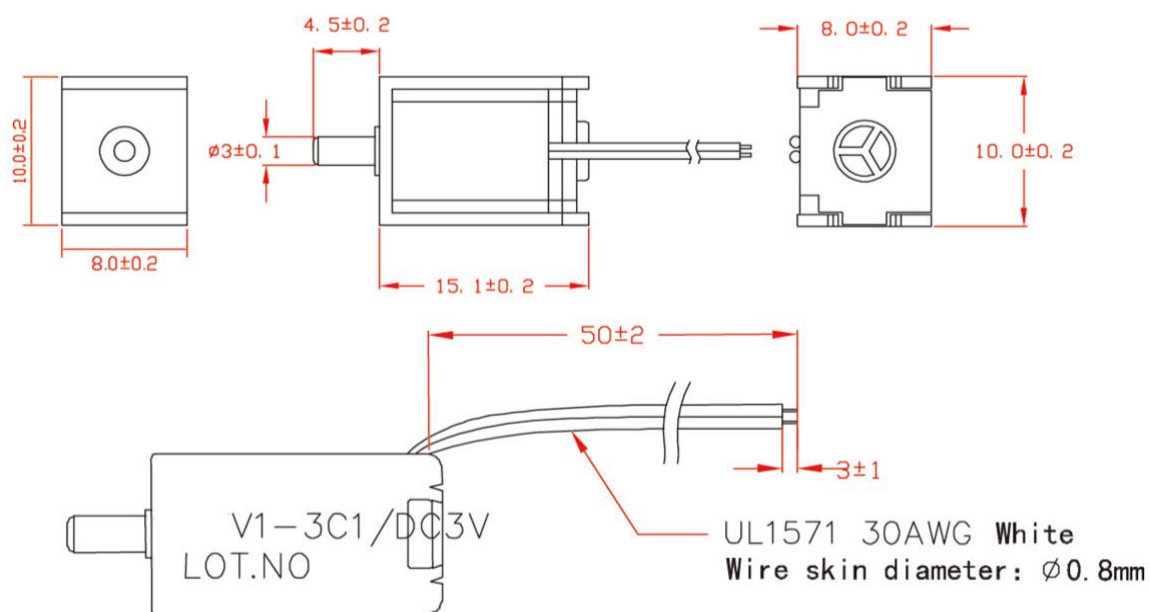

三、产品规格 Product Specification:

型号 Model	JMKV1-3C1
额定电压 Rated Voltage	DC 3V
额定电流 Rated Current	100mA
额定功率 Rated Power	0.3W
额定压力 Common Pressure	300mmHg
气密性 Leakage	≤3mmHg/min (under 300mmHg in a 100cc tank)
排气速度 Exhaust speed (300~15mmHg)	≤4sec
最低启动电压 Reartart voltage	DC 2.0V
绝缘电压 Dielectric Withstand	500V/MIN
寿命 Rated Life	≥30000 cycles
重量 Weight	5g



JMKV1-6B1

微型气阀 Mini Air Valve




一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、眼保姆、鱼缸、咖啡机等充气产品。

Mainly used for electronic sphygmomanometer, massage, blood pressure monitor, eye nanny, fish tank, coffee maker and other equipment products.

二、产品尺寸 Product Dimension:

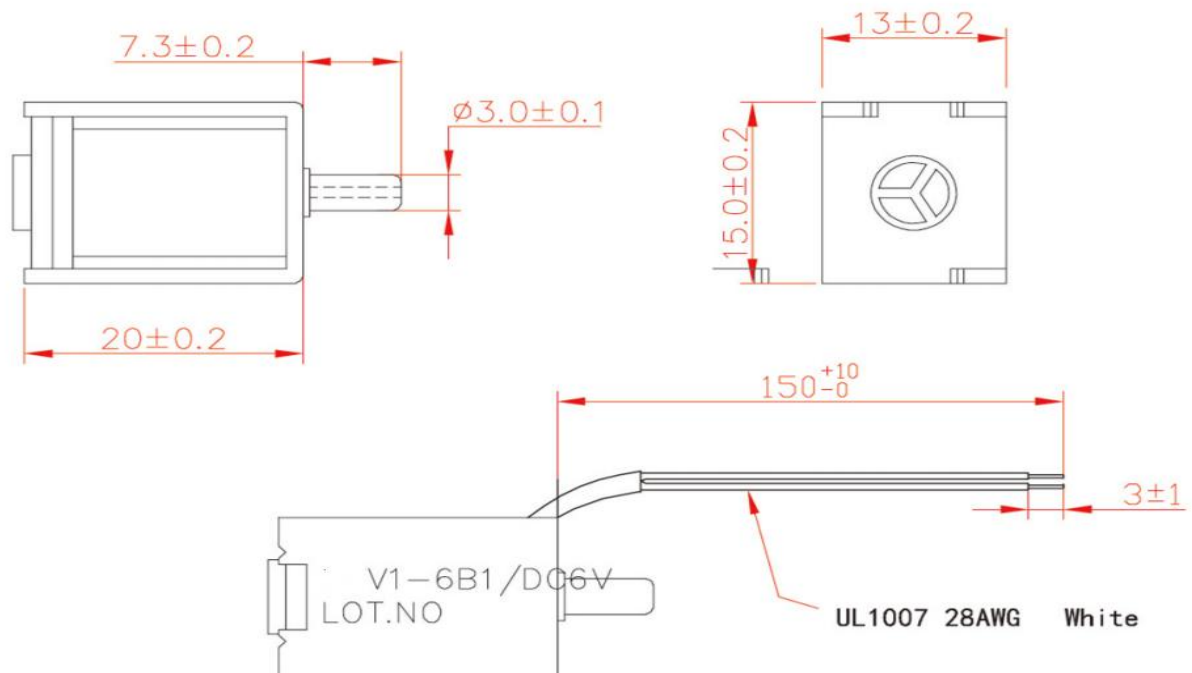

三、产品规格 Product Specification:

型号 Model	JMKV1-6B1
额定电压 Rated Voltage	DC 6V
额定电流 Rated Current	60mA
额定功率 Rated power consumption	0.36W
额定压力 Common pressure	300mmHg
气密性 Leakage	≤3mmHg/min (under 300mmHg in a 100cc tank)
排气速度 Exhaust speed (300~15mmHg)	≤4sec
最低启动电压 Reatart voltage	DC 3.0V
绝缘电压 Dielectric Withstand	500V/MIN
寿命 Rated Life	≥30000 cycles
重量 Weight	17g



JMKV2-12J

微型气阀 Mini Air Valve




一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、眼保姆、鱼缸、咖啡机等充气产品。

Mainly used for electronic sphygmomanometer, massage, blood pressure monitor, eye nanny, fish tank, beer and other equipment products.

二、产品尺寸 Product Dimension:

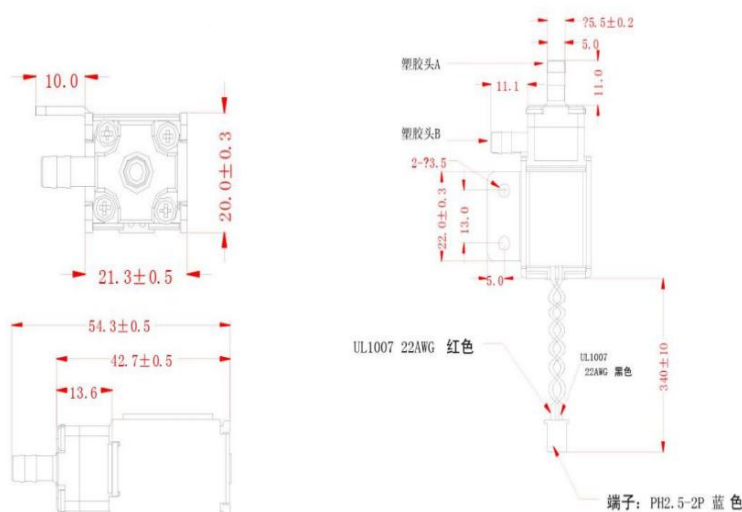

三、产品规格 Product Specification:

型号 Model	JMKV2-12J
额定电压 Rated Voltage	DC 12V
额定电流 Rated Current	120±10% mA
额定功率 Rated power consumption	1.44W
额定压力 Common pressure	234mmHg (4.5Psi)
气密性 Leakage	≤5ml/min(Under 230mmHg Pressure)
排气速度 Exhaust speed (300~15mmHg)	≤3sec
最低启动电压 Reatart voltage	DC 9.6V
绝缘电压 Dielectric Withstand	500V/MIN
寿命 Rated Life	≥10000 cycles
重量 Weight	57g



微型气阀 Mini Air Valve



Mainly used for electronic sphygmomanometer, massage, blood pressure monitor, eye nanny, fish tank, beer and other equipment products.

Technical drawing of the XH2.54-2P connector showing three views: front, top, and side. The front view shows a circular connector with a diameter of 3.0mm and a height of 10.0mm. The top view shows a rectangular connector with a width of 20.0mm and a height of 10.0mm. The side view shows the connector's profile with a total length of 45.9mm. Dimensions are given in millimeters with tolerances. Labels include "UL 1007 22AWG red/black color wire" and "End connector: XH2.54-2P".

型号 Model	JMKV2-12K			
额定电压 Rated Voltage	DC 6V	DC 9V	DC 12V	DC 24V
额定电流 Rated Current	400±10% mA	270±10% mA	200±10% mA	100±10% mA
出气口外径 Air Tap O.D.	Φ5.4mm			
额定压力 Common pressure	234mmHg (4.5PSI)			
媒介 Medium	Water/Air			
气密性 Leakage	≤5ml/min (Under 230mmHg Pressure)			
排气速度 Exhaust speed (300~15mmHg)	≤3sec(From 300 to 15 mmHg in a 500cc tank)			
绝缘等级 Insulation Level	A			
类型 Type	Normally Closed			
寿命 Rated Life	≥200000 cycles(ON 150S, OFF 30S)			
重量 Weight	58g			



伽太科技(厦门)有限公司
JETMAKER (Xiamen) Fluid Equipment Co.,LTD

JMKV415GB

微型气阀 Mini Air Valve




一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、眼保姆、鱼缸、咖啡机等充气产品。

Mainly used for electronic sphygmomanometer, massage, blood pressure monitor, eye nanny, fish tank, coffee maker and other equipment products.

二、产品尺寸 Product Dimension:

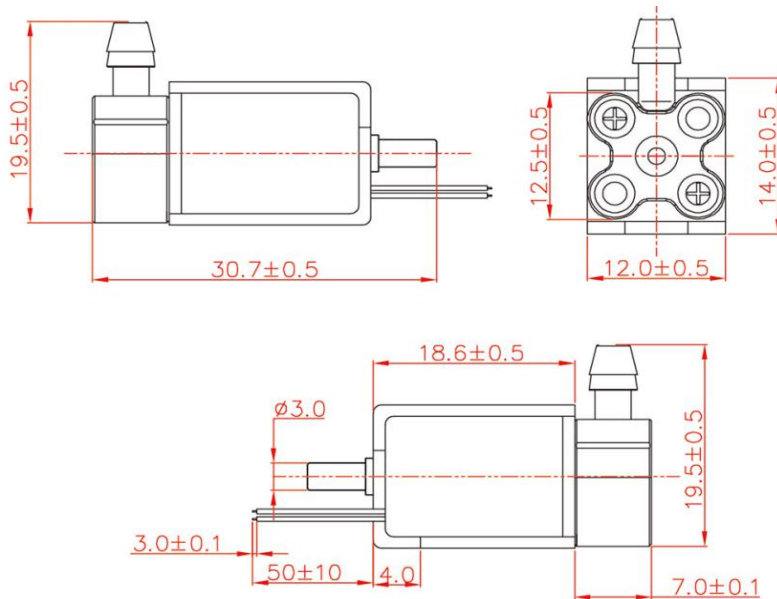

三、产品规格 Product Specification:

型号 Model	JMKV415GB
额定电压 Rated Voltage	DC 6V
额定电流 Rated Current	240mA
额定功率 Rated power consumption	1.44W
额定压力 Common pressure	300mmHg
气密性 Leakage	$\leq 3\text{mmHg/min}$ (Under 300mmHg Pressure)
排气速度 Exhaust speed (300~15mmHg)	$\leq 5\text{sec}$
最低启动电压 Reartart voltage	DC 3.5V
绝缘电压 Dielectric Withstand	500V/MIN
寿命 Rated Life	≥ 30000 cycles
重量 Weight	16g

Web: www.jmakerpump.com

Add: 6D, Bilida Building, No.22 Lvling Road, Siming District,Xiamen China



伽太科技(厦门)有限公司
JETMAKER (Xiamen) Fluid Equipment Co.,LTD

JMKV518GF

微型气阀 Mini Air Valve




一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、眼保姆、鱼缸、咖啡机等充气产品。

Mainly used for electronic sphygmomanometer, massage, blood pressure monitor, eye nanny, fish tank, beer and other equipment products.

二、产品尺寸 Product Dimension:

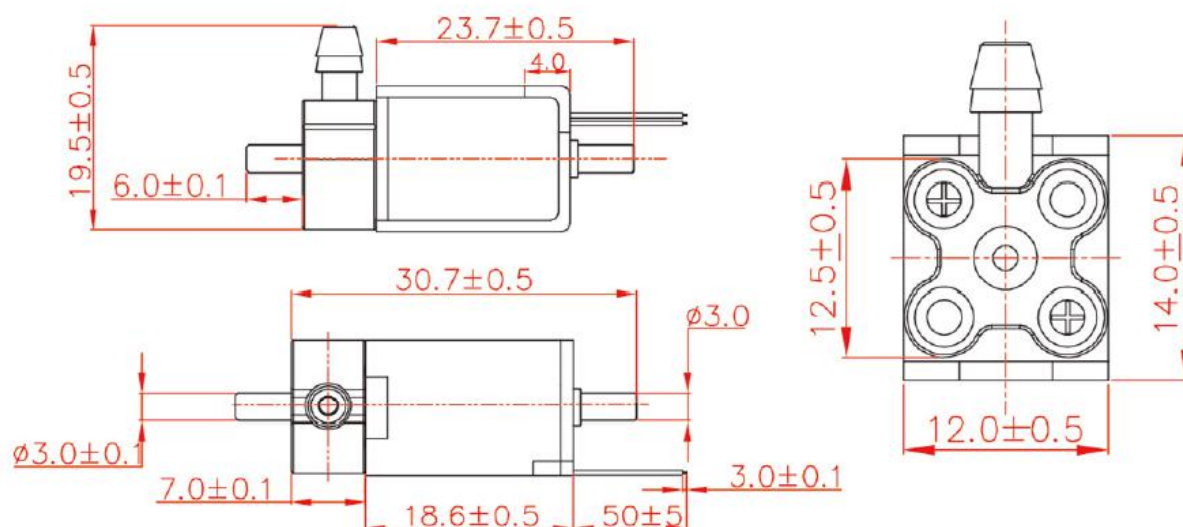

三、产品规格 Product Specification:

型号 Model	JMKV518GF
额定电压 Rated Voltage	DC 6V
额定电流 Rated Current	240mA
额定功率 Rated power consumption	1.44W
额定压力 Common pressure	300mmHg (300mmHg)
气密性 Leakage	$\leq 3\text{mmHg/min}$ (Under 300mmHg Pressure)
排气速度 Exhaust speed (300~15mmHg)	$\leq 4\text{sec}$
最低启动电压 Reartart voltage	DC 3.5V
绝缘电压 Dielectric Withstand	500V/MIN
寿命 Rated Life	≥ 30000 cycles
重量 Weight	15g

Web: www.jmakerpump.com

Add: 6D, Bilida Building, No.22 Lvling Road, Siming District, Xiamen China



JMKV-520GF

微型气阀 Mini Air Valve




一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪等充气产品。

Mainly used for electronic sphygmomanometer, massage, blood pressure monitor, eye nanny and other equipment products.

二、产品尺寸 Product Dimension:

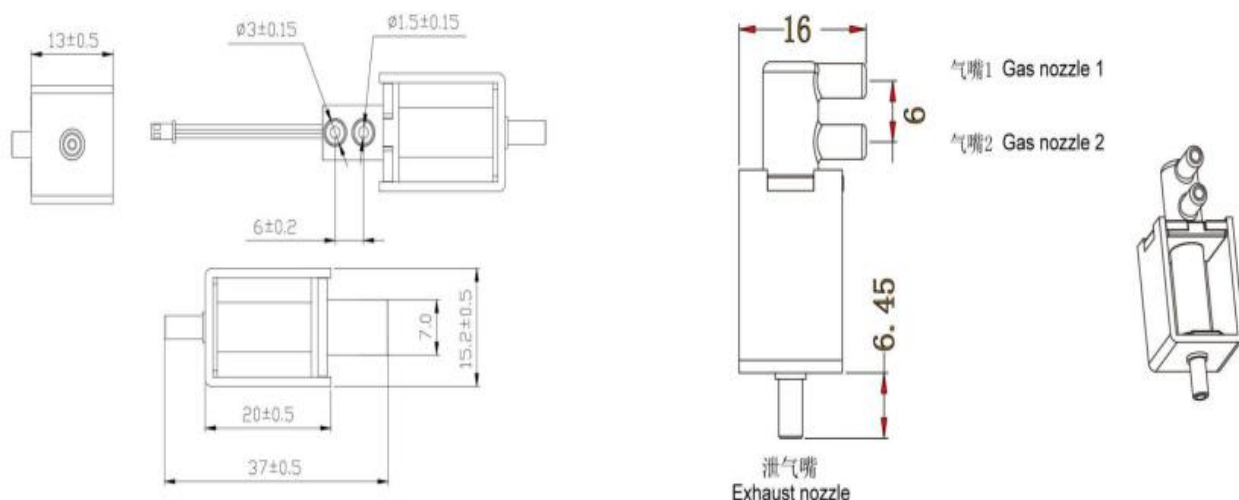

三、产品规格 Product Specification:

型号 Model	JMKV-520GF		
额定电压 Rated Voltage	DC 6V	DC 12V	DC 24V
额定电流 Rated Current	320±10% mA	1800±10% mA	100±10% mA
出气口外径 Air Tap O.D.	Φ3mm		
额定压力 Common pressure	350mmHg (4.5PSI)		
媒介 Medium	Water/Air		
气密性 Leakage	≤5ml/min (Under 350mmHg Pressure)		
排气速度 Exhaust speed (300~15mmHg)	≤3sec(From 300 to 15 mmHg in a 500cc tank)		
绝缘等级 Insulation Level	A		
类型 Type	Normally Closed/Open/ two position,three ways.		
寿命 Rated Life	≥200000 cycles(ON 150S, OFF 30S)		
重量 Weight			



伽太科技(厦门)有限公司
JETMAKER (Xiamen) Fluid Equipment Co.,LTD

JMKV526G

微型气阀 Mini Air Valve




一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、眼保姆、鱼缸、咖啡机等充气产品。

Mainly used for electronic sphygmomanometer, massage, blood pressure monitor, eye nanny, fish tank, coffee maker and other equipment products.

二、产品尺寸 Product Dimension:

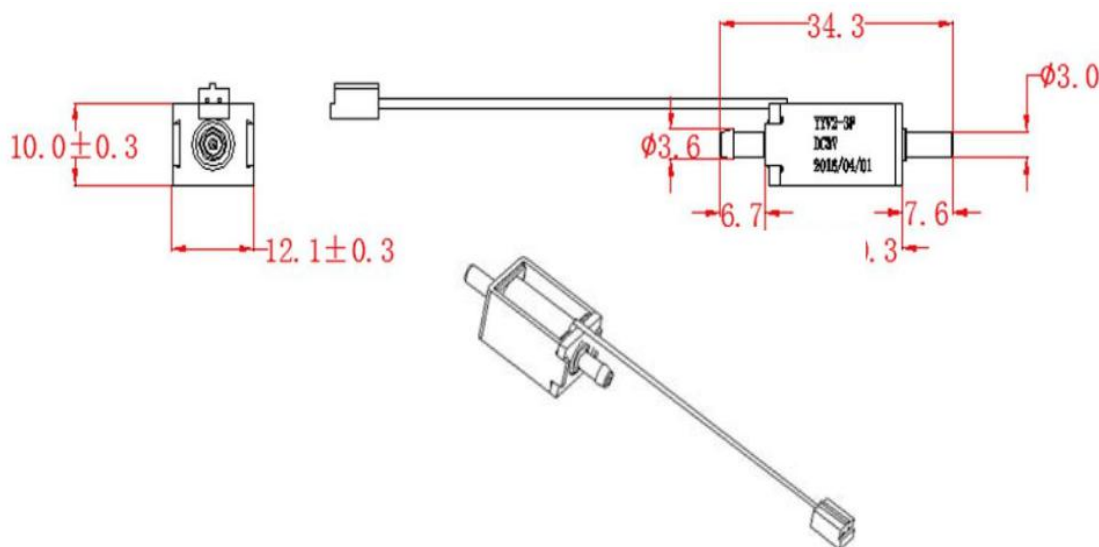

三、产品规格 Product Specification:

型号 Model	JMKV526G			
额定电压 Rated Voltage	DC 3V	DC 6V	DC 9V	DC 12V
额定电流 Rated Current	200±10% mA	200±10% mA	150±10% mA	100±10% mA
电阻 DC Resistance	15±10% Ω	30±10% Ω	60±10% Ω	120±10% Ω
介质 Medium	Air			
进气口外径 Outlet O.D.	Φ3.6mm			
额定压力 Common pressure	300mmHg			
气密性 Leakage	≤3mmHg/min (under 300mmHg in a 100cc tank)			
排气速度 Exhaust speed (300~15mmHg)	≤5sec(From 300 to 15mmHg in a 100cc tank))			
绝缘等级 Insulation Level	A			
模式 Type	Normally Open Or Normally Closed			
寿命 Rated Life	≥200000 cycles(ON 1s, OFF 2s)			
重量 Weight	11g			

Web: www.jmakerpump.com

Add: 6D, Bilida Building, No.22 Lving Road, Siming District,Xiamen China



JMKV526GC

微型气阀 Mini Air Valve


一、产品应用 Product Applications:

主要用于吸奶器、按摩器、吸鼻涕器等充气产品。

Mainly used for breast pump, massage, breathe in nasal mucus and other equipment products.



二、产品尺寸 Product Dimension:

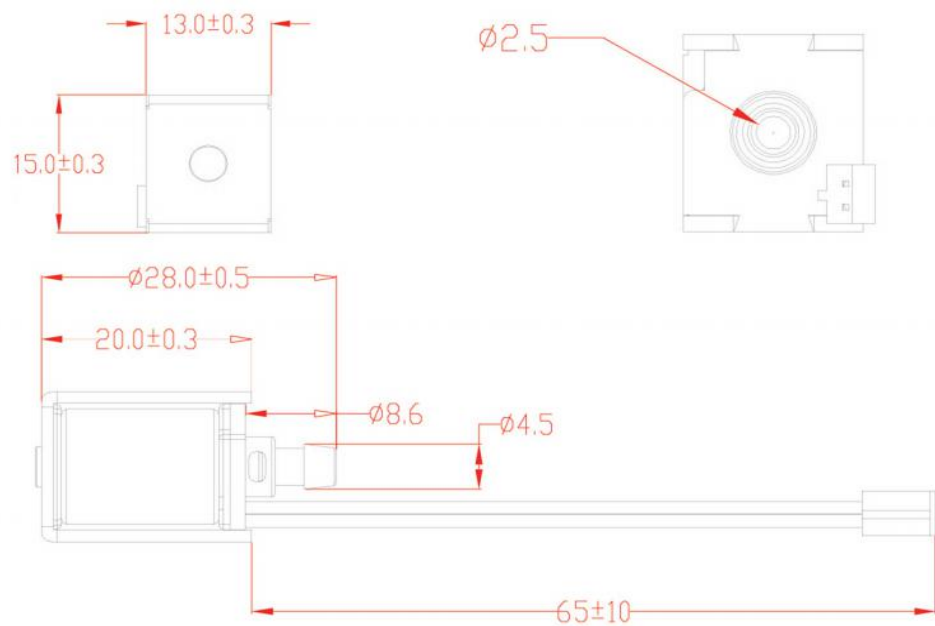

三、产品规格 Product Specification:

型号 Model	JMKV526GC				
额定电压 Rated Voltage	DC 3V	DC 4.5V	DC 6V	DC 9V	DC 12V
额定电流 Rated Current	375±10% mA	375±10% mA	350±10% mA	230±10% mA	170±10% mA
直流阻抗 DC Resistance	8±10% Ω	12±10% Ω	17±10% Ω	40±10% Ω	70±10% Ω
进气口外径 Outlet O.D.	Φ4.5mm				
额定压力 Common pressure	-50KPa				
媒介 Medium	Air				
气密 Leakage	≤1mmHg/min (From -100mmHg in a 100cc tank)				
排气速度 Exhaust speed (300~15mmHg)	≤1sec(From -300 to -15mmHg in a 100cc tank))				
绝缘等级 Insulation Level	A				
模式 Type	Normally Closed				
寿命 Rated Life	≥200000 cycles(ON 1s, OFF 2s)				
重量 Weight	16.2g				



伽太科技(厦门)有限公司

JETMAKER (Xiamen) Fluid Equipment Co.,LTD

JMKV626G

微型气阀 Mini Air Valve




一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、眼保姆、鱼缸、咖啡机等充气产品。

Mainly used for electronic sphygmomanometer, massage, blood pressure monitor, eye nanny, fish tank, coffee maker and other equipment products.

二、产品尺寸 Product Dimension:

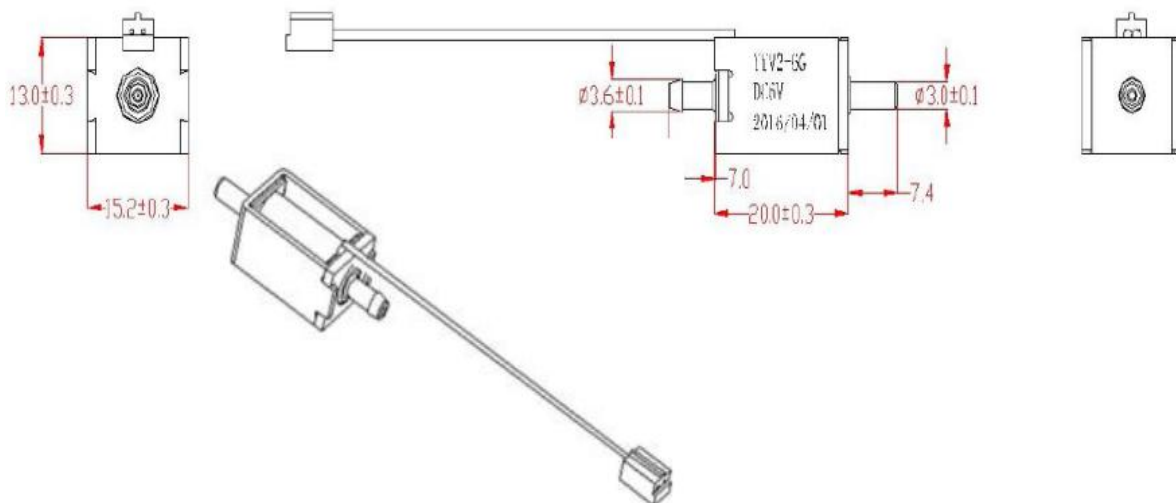

三、产品规格 Product Specification:

型号 Model	JMKV626G			
额定电压 Rated Voltage	DC 3V	DC 6V	DC 9V	DC 12V
额定电流 Rated Current	300±10% mA	200±10% mA	150±10% mA	100±10% mA
电阻 DC Resistance	15±10% Ω	30±10% Ω	60±10% Ω	120±10% Ω
介质 Medium	Air			
额定压力 Common pressure	300mmHg			
气密性 Leakage	≤3mmHg/min (under 300mmHg in a 100cc tank)			
排气速度 Exhaust speed (300~15mmHg)	≤5sec(From 300 to 15mmHg in a 100cc tank))			
绝缘等级 Insulation Level	A			
模式 Type	Normally Open Or Normally Closed			
寿命 Rated Life	≥200000 cycles(ON 1S, OFF 2S)			
重量 Weight	16g			



JMKV526GC-5

微型气阀 Mini Air Valve


1.产品应用 Product Applications:

主要用于按摩器等充气产品。

Mainly used for massage and other equipment products.



二、产品尺寸 Product Dimension:

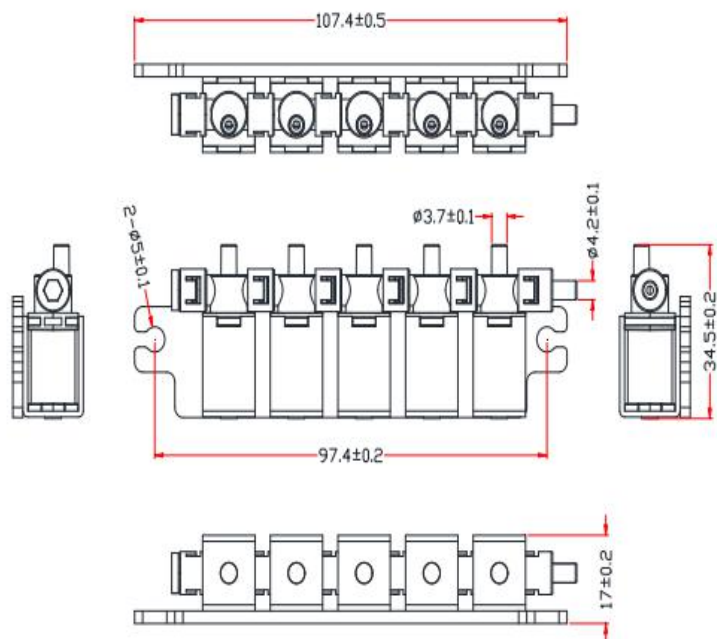

三、产品规格 Product Specification:

型号 Model	JMKV526GC-5		
额定电压 Rated Voltage	DC 6V	DC 12V	DC 24V
额定电流 Rated Current	≤240mA	≤180mA	≤100mA
额定功率 Rated power consumption	≤1.44W	≤2.16W	≤2.4W
额定压力 Common pressure	≤350mmHg	≤350mmHg	≤350mmHg
气密 Leakage	≤15mmHg/min	≤15mmHg/min	≤15mmHg/min
排气速度 Exhaust speed (300~15mmHg)	≤4sec	≤4sec	≤4sec
最低启动电压 Reartart voltage	DC 4.8V	DC 9.8V	DC 20.5V
寿命 Rated Life	≥180000 cycles	≥180000 cycles	≥180000 cycles



伽太科技(厦门)有限公司
JETMAKER (Xiamen) Fluid Equipment Co.,LTD

JMKVP840GF

微型气阀 Mini Air Valve



1.产品应用 Product Applications:

主要用于按摩器等充气产品。


Mainly used for massage and other equipment products.

3.产品应用 Product Applications:

主要用于按摩器等充气产品

Mainly used for massage and other equipment products.

二、产品尺寸 Product Dimension:

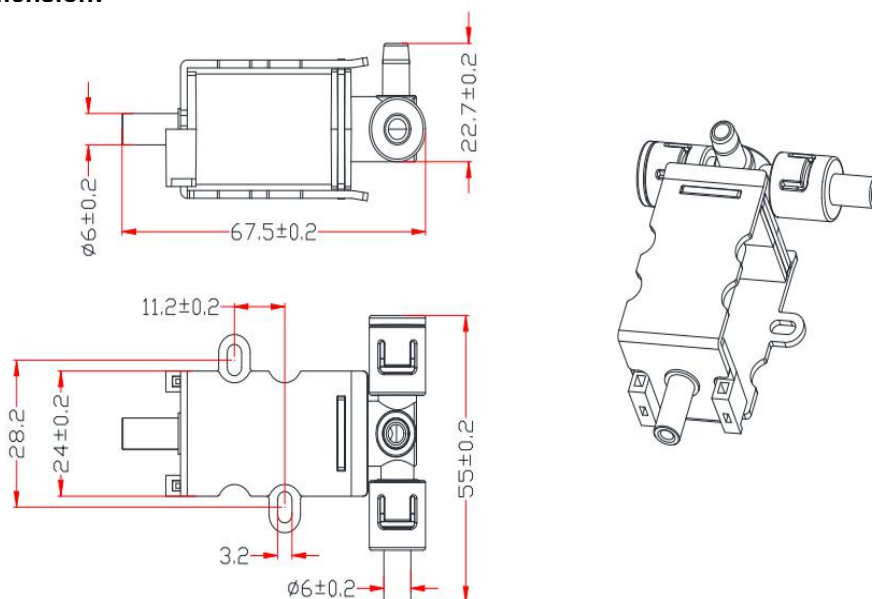

三、产品规格 Product Specification:

型号 Model	JMKVP840GF		
额定电压 Rated Voltage	DC 6V	DC 12V	DC 24V
额定电流 Rated Current	≤570mA	≤430mA	≤240mA
额定功率 Rated power consumption	3.4W	5.1W	5.8W
额定压力 Common pressure	≤350mmHg	≤350mmHg	≤350mmHg
气密 Leakage	≤15mmHg/min	≤15mmHg/min	≤15mmHg/min
排气速度 Exhaust speed (300~15mmHg)	≤3sec	≤3sec	≤3sec
最低启动电压 Reatart voltage	DC 4.8V	DC 10V	DC 20V
寿命 Rated Life	≥200000 cycles	≥200000 cycles	≥200000 cycles

Web: www.jmakerpump.com

Add: 6D, Bilida Building, No.22 Lvling Road, Siming District,Xiamen China



伽太科技(厦门)有限公司
JETMAKER (Xiamen) Fluid Equipment Co.,LTD

JMKV829GFW

微型水/水蒸气阀 Mini water Valve




一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、眼保姆、鱼缸、咖啡机等充气产品。

Mainly used for electronic sphygmomanometer, massage, blood pressure monitor, eye nanny, fish tank, coffee maker and other equipment products.

二、产品尺寸 Product Dimension:

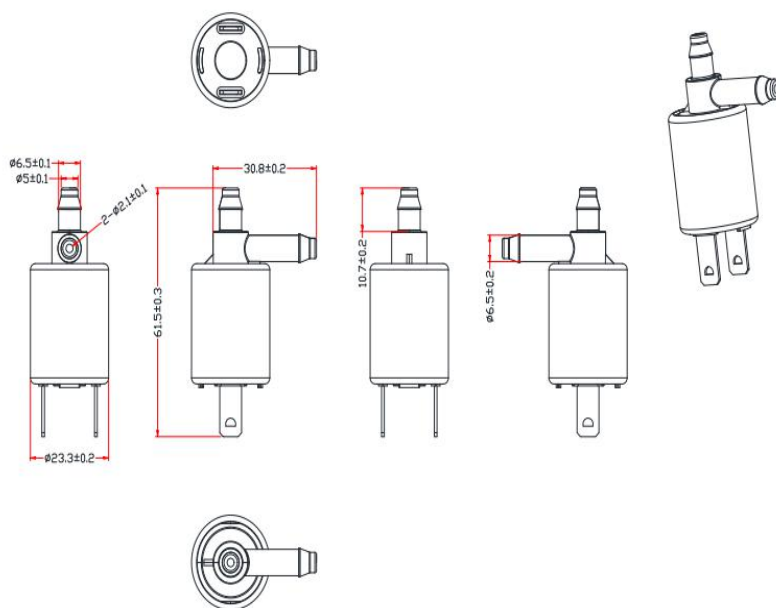

三、产品规格 Product Specification:

型号 Model	JMKV829GFW		
额定电压 Rated Voltage	DC 6V	DC 12V	DC 24V
额定电流 Rated Current	$\leq 180\text{mA}$	$\leq 110\text{mA}$	$\leq 68\text{mA}$
电阻 DC Resistance	$65 \pm 5\%$	$114 \pm 5\%$	$370 \pm 5\%$
介质 Medium	Water		
最低工作电压 Working voltage range	$< 4.5\text{V}$	$< 10.5\text{V}$	$< 21.5\text{V}$
气密性 Leakage	$\leq 1\text{CC/min}$		
负载流量 Flow Under Load	$\geq 11\text{L/min}$		
绝缘等级 Insulation Level	A		
寿命 Rated Life	≥ 200000 cycles (ON 1S, OFF 2S)		
重量 Weight	16g		

Web: www.jmakerpump.com

Add: 6D, Bilida Building, No.22 Lvling Road, Siming District, Xiamen China



JMKV2-12WV

微型水/水蒸气阀 Mini Water Valve




一、产品应用 Product Applications:

主要用于电子血压计、按摩器、血压监护仪、眼保姆、鱼缸、咖啡机等充气产品。

Mainly used for electronic sphygmomanometer, massage, blood pressure monitor, eye nanny, fish tank, beer and other equipment products.

二、产品尺寸 Product Dimension:

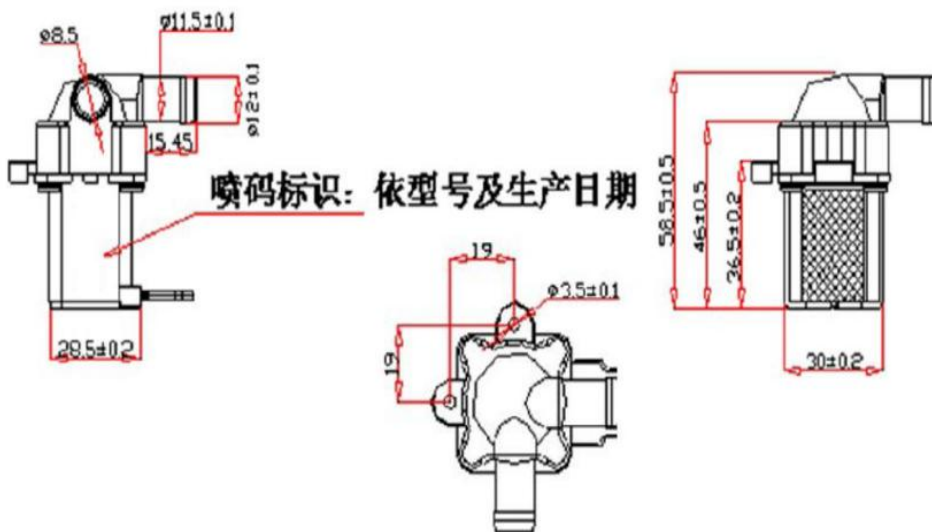

三、产品规格 Product Specification:

型号 Model	JMKV2-12WV		
额定电压 Rated Voltage	DC 12V	DC 24V	AC 120V
额定电流 Rated Current	200 $\pm$ 10% mA	100 $\pm$ 10% mA	60 $\pm$ 10% mA
出气口外径 Air Tap O.D.	Φ 12mm		
额定压力 Common pressure	5KPa		
介质 Medium	Water		
气密 Leakage	$\leq$ 5ml/min under 5KPa		
排气速度 Exhaust speed (300~15mmHg)	$\leq$ 1sec(From 300 to 15 mmHg in a 500cc tank)		
绝缘等级 Insulation Level	A		
类型 Type	Normally Closed		
寿命 Rated Life	$\geq$ 200000 cycles(ON 150S, OFF 30S)		
重量 Weight	104g		



伽太科技(厦门)有限公司
JETMAKER (Xiamen) Fluid Equipment Co.,LTD

JMKV13-12A

微型气阀 Mini Air Valve


一、产品应用 Product Applications:

主要用于按摩器等充气产品。

Mainly used for massage and other equipment products.



二、产品尺寸 Product Dimension:

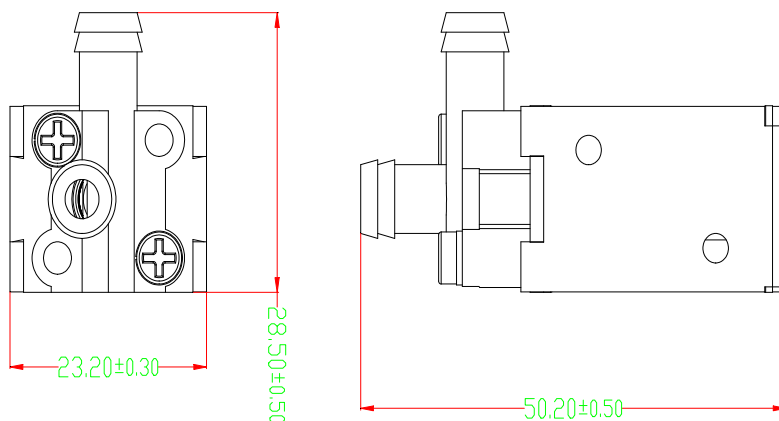

三、产品规格 Product Specification:

型号 Model	JMKV13-12A
额定电压 Rated Voltage	DC 12V
额定电流 Rated Current	140mA
额定功率 Rated power consumption	1.68W
额定压力 Common pressure	350mmHg
气密性 Leakage	≤15mmHg/min
排气速度 Exhaust speed (300~15mmHg)	≤4sec
最低启动电压 Reatart voltage	DC 10V
寿命 Rated Life	≥500000 cycles

Web: www.jmakerpump.com

Add: 6D, Bilida Building, No.22 Lvling Road, Siming District,Xiamen Ch



JMKV23-12A

微型气阀 Mini Air Valve


一、产品应用 Product Applications:

主要用于按摩器等充气产品。

Mainly used for massage and other equipment products.



二、产品尺寸 Product Dimension:

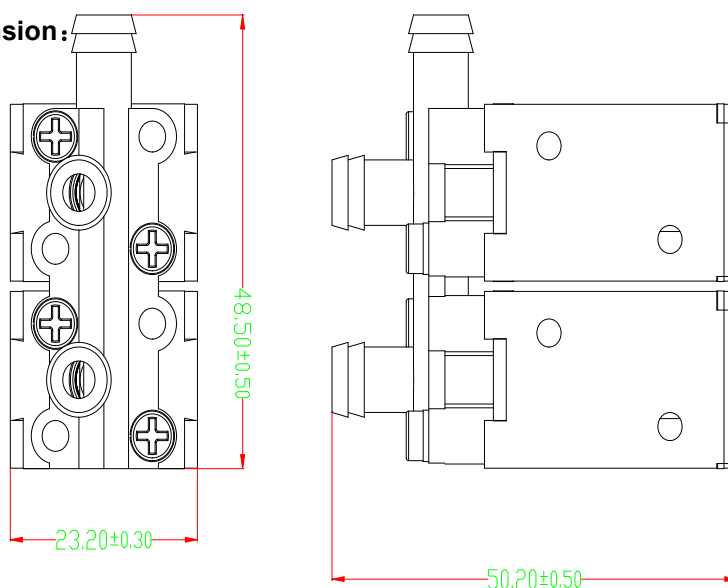

三、产品规格 Product Specification:


型号 Model	JMKV23-12A
额定电压 Rated Voltage	DC 12V
额定电流 Rated Current	280mA
额定功率 Rated power consumption	3.36W
额定压力 Common pressure	350mmHg
气密 Leakage	≤15mmHg/min
排气速度 Exhaust speed (300~15mmHg)	≤4sec
最低启动电压 Reartart voltage	DC 10V
寿命 Rated Life	≥500000 cycles



伽太科技(厦门)有限公司
JETMAKER (Xiamen) Fluid Equipment Co.,LTD

JMKV33-12A

微型气阀 Mini Air Valve

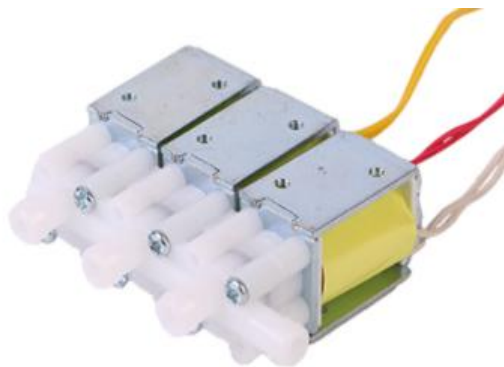


一、产品应用 Product Applications:

主要用于按摩器等充气产品。

Mainly used for massage and other equipment products.

二、产品尺寸 Product Dimension:

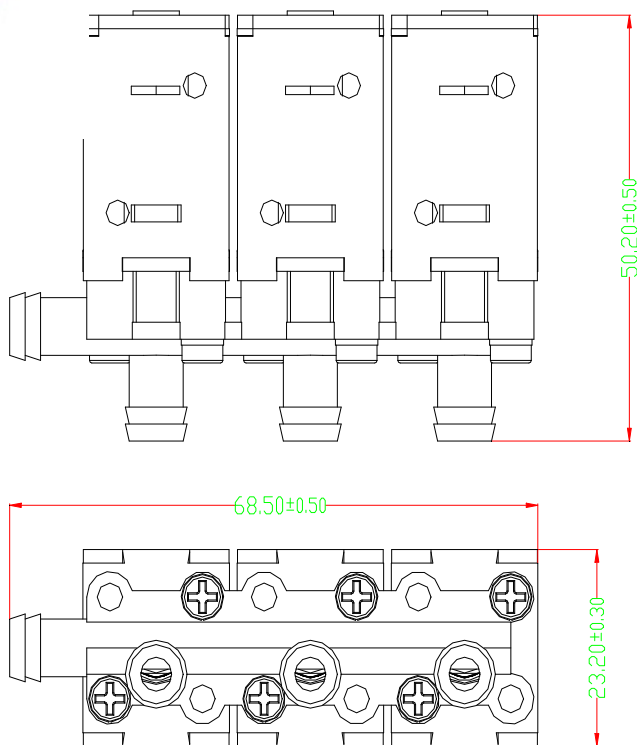

三、产品规格 Product Specification:

型号 Model	JMKV33-12A
额定电压 Rated Voltage	DC 12V
额定电流 Rated Current	420mA
额定功率 Rated power consumption	5.04W
额定压力 Common pressure	350mmHg
气密 Leakage	≤15mmHg/min
排气速度 Exhaust speed (300~15mmHg)	≤4sec
最低启动电压 Reatart voltage	DC 10V
寿命 Rated Life	≥500000 cycles


Web: www.jmakerpump.com

Add: 6D, Bilida Building, No.22 Lvling Road, Siming District,Xiamen Ch



JMKV43-A12A1

微型气阀 Mini Air Valve

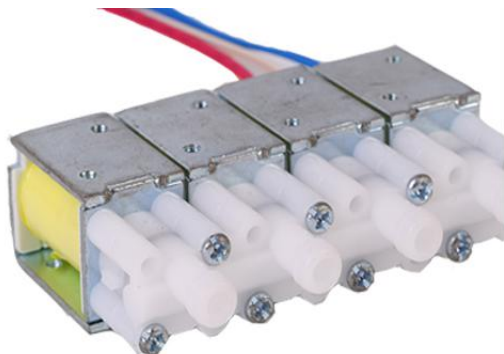


1.产品应用 Product Applications:

主要用于按摩器等充气产品。

Mainly used for massage and other equipment products.

二、产品尺寸 Product Dimension:

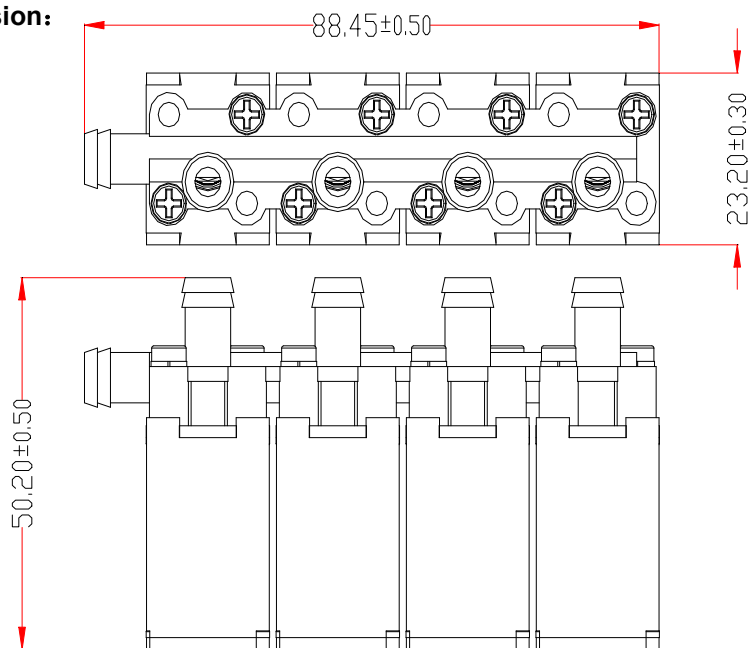

三、产品规格 Product Specification:


型号 Model	JMKV43-A12A1
额定电压 Rated Voltage	DC 12V
额定电流 Rated Current	560mA
额定功率 Rated power consumption	6.72w
额定压力 Common pressure	350mmHg
气密 Leakage	≤15mmHg/min
排气速度 Exhaust speed (300~15mmHg)	≤4sec
最低启动电压 Reartart voltage	DC 10V
寿命 Rated Life	≥500000 cycles



伽太科技(厦门)有限公司
JETMAKER (Xiamen) Fluid Equipment Co.,LTD

JMKV53-A12A1

微型气阀 Mini Air Valve

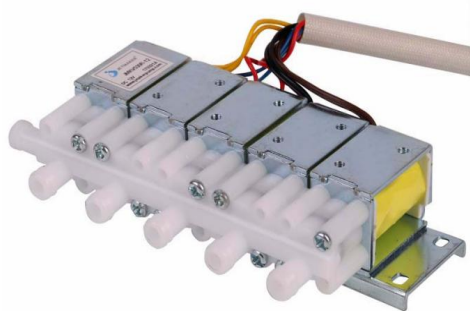


1.产品应用 Product Applications:

主要用于按摩器等充气产品。

Mainly used for massage and other equipment products.

二、产品尺寸 Product Dimension:

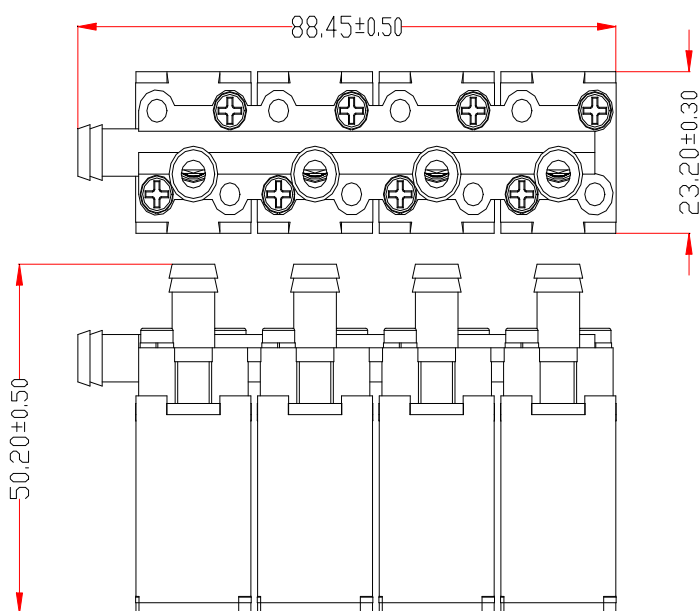

三、产品规格 Product Specification:

型号 Model	JMKV53-A12A1
额定电压 Rated Voltage	DC 12V
额定电流 Rated Current	700mA
额定功率 Rated power consumption	8.4W
额定压力 Common pressure	350mmHg
气密 Leakage	$\leq 15\text{mmHg/min}$
排气速度 Exhaust speed (300~15mmHg)	$\leq 4\text{sec}$
最低启动电压 Reatart voltage	DC 10V
寿命 Rated Life	≥ 500000 cycles

Web: www.jmakerpump.com

Add: 6D, Bilida Building, No.22 Lvling Road, Siming District,Xiamen



伽太科技(厦门)有限公司
JETMAKER (Xiamen) Fluid Equipment Co.,LTD

JMKV-12A series

微型气阀 Mini Air Valve




一、产品应用 Product Applications:

主要用于按摩器等充气产品。

Mainly used for massage and other equipment products.

二、产品尺寸 Product Dimension:

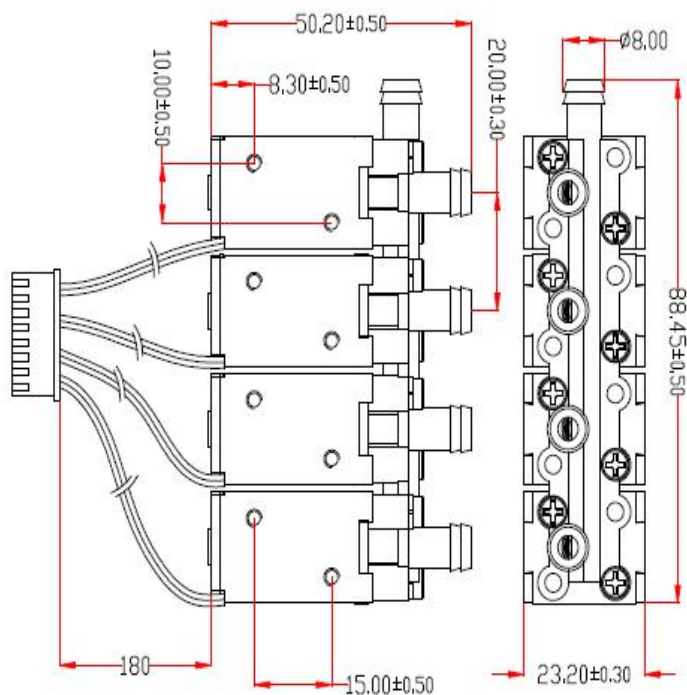

三、产品规格 Product Specification:

型号 Model	JMKV13-12A	JMKV23-12A	JMKV33-12A	JMKV43-12A	JMKV53-12A
额定电压 Rated Voltage	DC 12V				
额定电流 Rated Current	140mA	140mA*2	140mA*3	140mA*4	140mA*5
额定功率 Rated power consumption	1.7W	1.7W*2	1.7W*3	1.7W*4	1.7W*5
额定压力 Common pressure	400mmHg				
气密 Leakage	≤15mmHg/min				
排气速度 Exhaust speed (300~15mmH	≤4sec				
最低启动电压 Reatart voltage	DC 10.5V				
寿命 Rated Life	≥500000 cycles				

Web: www.jmakerpump.com

Add: 6D, Bilida Building, No.22 Lvling Road, Siming District,Xiamen China



PPM-100

微型液体泵 Mini Liquid Pump


一、产品应用 Product Applications:

主要用于家用电器,医疗,美容按摩,洗手液机产品。

Mainly used for Home appliances, Medical, Beauty, Massage, Hand sanitizer foaming machine and other equipment products.



二、产品尺寸 Product Dimension:

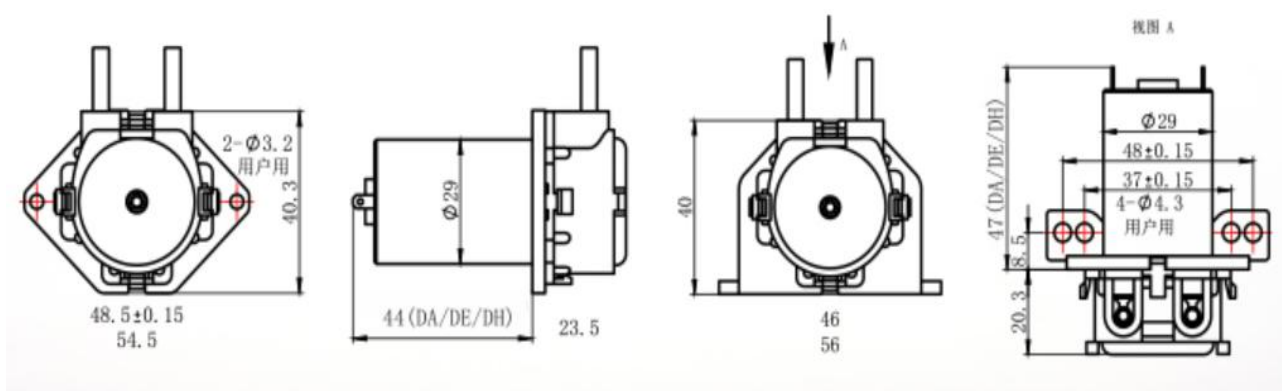

三、产品规格 Product Specification:

型号 Model	PPM -100			
额定电压 Rated Voltage	DC 3V	DC 6V	DC 12V	DC 24V
额定电流 Rated Current	≤1200mA	≤600mA	≤400mA	≤300mA
气嘴口径 Air Tap O.D.	Ø6.5mm			
抽液量 Water Flow	5.2~90ML/Min			
额定功率 Rated Power	3.6 W			
最大真空度 Max.Vacuum	≥200Kpa			
泵管寿命 Pump Tube Life	≥200H-1000H			
扬程 Pump Head	≥2m			
吸程 Suction Head	≥2m			
噪音 Noise Level	≤65dB(30cm away)			
环境温度 Ambient Temperature	0-40 °C			
相对湿度 Relative Humidity	<80%			
安装 Installation	Straight Panel/L Panel			
重量 Weight	110g			
寿命测试 Life Test	≥ 100,000 Times(ON 2S,OFF 2S)			
泵管 Pump Tube	Rubber Tube/BPT Tube			



伽太科技(厦门)有限公司
JETMAKER (Xiamen) Fluid Equipment Co.,LTD

JMKP-310A

微型液体泵 Mini Liquid Pump


一、产品应用 Product Applications:

主要用于家用电器,医疗,美容按摩,洗手液机产品。

Mainly used for Home appliances, Medical, Beauty, Massage, Hand sanitizer foaming machine and other equipment products.



二、产品尺寸 Product Dimension:

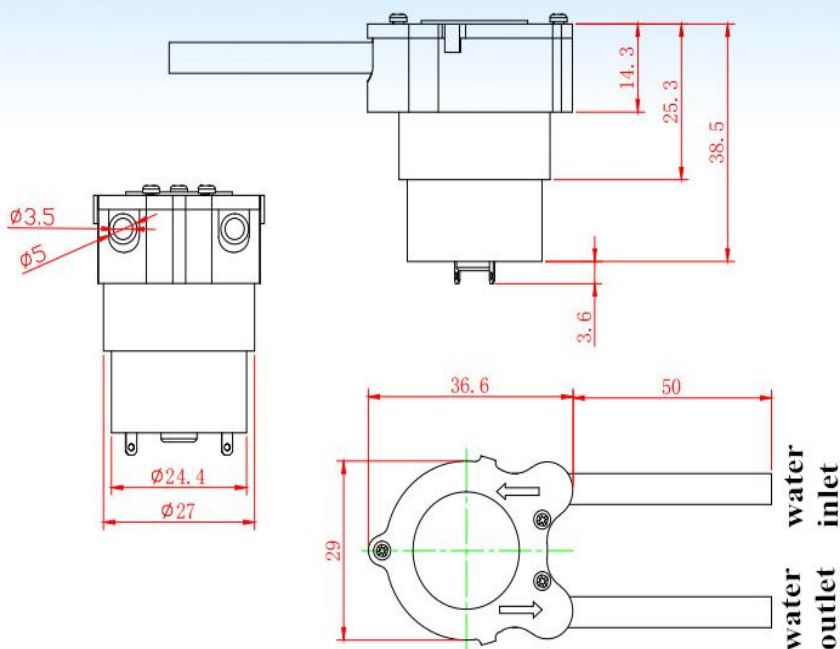

三、产品规格 Product Specification:

型号 Model	JMKP-310A			
额定电压 Rated Voltage	DC 3V	DC 3.7V	DC 4.5V	DC 6V
额定电流 Rated Current	≤1000mA	≤810mA	≤660mA	≤500mA
额定功率 Rated Power	3.0 W			
气嘴口径 Air Tap O.D.	Ø6.5mm			
抽液量 Water Flow	0.05-0.2LPM			
最大真空度 Max.Vacuum	≤-20 Kpa			
噪音 Noise Level	≤65dB(30cm away)			
寿命测试 Life Test	≥ 100,000 Times(ON 2S,OFF 2S)			
扬程 Pump Head	≥0.5m			
吸程 Suction Head	≥0.5m			
重量 Weight	42g			

Web: www.jmakerpump.com

Add: 6D, Bilida Building, No.22 Lvling Road, Siming District,Xiamen China



伽太科技(厦门)有限公司
JETMAKER (Xiamen) Fluid Equipment Co.,LTD

JMKP-310B

微型液体泵 Mini Liquid Pump


一、产品应用 Product Applications:

主要用于家用电器,医疗,美容按摩,洗手液机产品。

Mainly used for Home appliances, Medical, Beauty, Massage, Hand sanitizer foaming machine and other equipment products.



二、产品尺寸 Product Dimension:

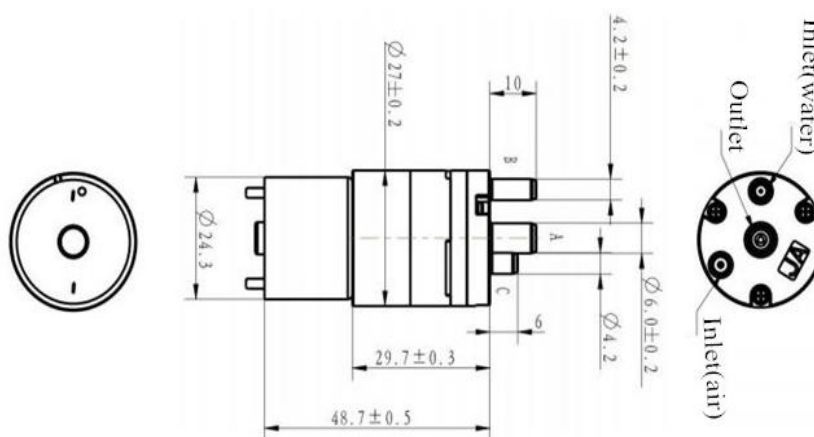

三、产品规格 Product Specification

型号 Model	JMKP-310B			
额定电压 Rated Voltage	DC 3V	DC 6V	DC 9V	DC 12V
额定电流 Rated Current	≤1200mA	≤600mA	≤400mA	≤300mA
额定功率 Rated Power	3.6 W			
气嘴口径 Air Tap O.D.	Ø5.0mm			
抽液量 Water Flow	0.3-0.8LPM			
最大真空度 Max.Vacuum	≥200Kpa			
噪音 Noise Level	≤65dB(30cm away)			
寿命测试 Life Test	≥ 100,000 Times(ON 2S,OFF 2S)			
扬程 Pump Head	≥0.5m			
吸程 Suction Head	≥0.5m			
重量 Weight	40g			

Web: www.jmakerpump.com

Add: 6D, Bilida Building, No.22 Lvling Road, Siming District,Xiamen China



JMKP-310C

微型液体泵 Mini Liquid Pump


一、产品应用 Product Applications:

主要用于家用电器,医疗,美容按摩,洗手液机产品。

Mainly used for Home appliances, Medical, Beauty, Massage, Hand sanitizer foaming machine and other equipment products.



二、产品尺寸 Product Dimension:

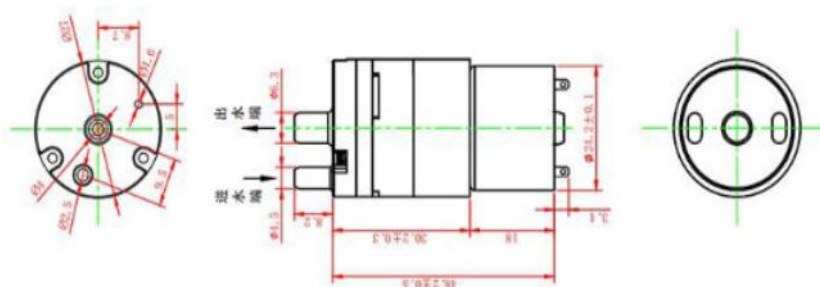

三、产品规格 Product Specification

型号 Model	JMKP-310C			
额定电压 Rated Voltage	DC 3V	DC 6V	DC 9V	DC 12V
额定电流 Rated Current	≤1200mA	≤600mA	≤400mA	≤300mA
额定功率 Rated Power	3.6 W			
气嘴口径 Air Tap O.D.	Ø6.5mm			
抽液量 Water Flow	0.3-1.2LPM			
最大真空度 Max.Vacuum	≥200Kpa			
噪音 Noise Level	≤65dB(30cm away)			
寿命测试 Life Test	≥ 100,000 Times(ON 2S,OFF 2S)			
扬程 Pump Head	≥0.5m			
吸程 Suction Head	≥0.5m			
重量 Weight	42g			